RYU®

POWER TOOLS • ACCESSORIES • ENGINE

CATALOGUE 2022

BRAND CONCEPT

RYU is a power tool series made to meet the needs for reliable power tools, engine, welding and accessories in multiple segments, ranging from engineering and building to automotive industry and household. Our motto is Quality, Guarantee and Advantageous. This motto implies that consumers who use our quality products will get guarantee of warranty so that they feel comfortable and safe when using **RYU**. Furthermore, at an affordable price, consumers will gain more benefit because they can own power tool products they want without having to spend more.

RYU has set up service centers in major cities such as Jakarta, Bandung, Surabaya, Makassar, Denpasar, Manado and other cities in order to guarantee our products warranty. All **RYU** products are supported by continuous innovation and reliable technology developed to meet our consumers' needs.

TABLE OF CONTENTS

Brand Concept	1
Table Of Contents	2
Service center	3
Powertools	4 - 36
Cordless	37 - 45
Accessories	46 - 65
Engine	66 - 77
Welding	78 - 82

SERVICE CENTER

SPAREPART CENTER MUARA BARU
GANG MARLINA NO.12 B MUARA BARU
TELP : (021) 26081377

SPAREPART CENTER SAMARINDA
JL. ELANG NO.86E SAMARINDA 75115
KALIMANTAN TIMUR
TELP : (0541) 4121573

SPAREPART CENTER LTC
LINDETEVES TRADE CENTER LANTAI GF2
BLOK C27 NO.7/8 JAKARTA
TELP : (021) 62316756

SPAREPART CENTER PEKANBARU
JL. KURAS NO. 3C, PEKANBARU
TELP : (0761) 45762

SPAREPART CENTER BANDUNG
JL. LENGKONG KECIL NO.30 B
BANDUNG, JAWA BARAT
TELP : (022) 20512433

SPAREPART CENTER MAKASSAR
JL. SUMBA NO. 15 A
KEL. PATTUNUANG KEC. WAJO, MAKASSAR
TELP : (0411) 8001985

SPAREPART CENTER SURABAYA
KOMPLEK RUKO ATOM MEGAH
JL. GEMBONG NO.38 H KAPASAN SURABAYA
TELP : (031) 3725631

SPAREPART CENTER MANADO
JL. PIERE TENDEAN BOULEVARD
MEGA MAS BLOK SMART 2 NO.4
MANADO, SULAWESI UTARA
TELP :

SPAREPART CENTER MEDAN
JL. PANDU N0.10 KEL. AUR KEC. MEDAN MAIMUN
MEDAN, SUMATERA UTARA
TELP : (061) 4578218

SPAREPART CENTER LAMPUNG
JL. IKAN TENGGIRI NO.124 LK II RT.023
KEL. PESAWAHAN KEC. TELUK BETUNG
SELATAN BANDAR LAMPUNG
TELP : (0721) 481711

SPAREPART CENTER PONTIANAK
JL. TANJUNG PURA NO.206A RT.004/03
BENUA MELAYU LAUT, PONTIANAK SELATAN
PONTIANAK
TELP : (0561) 8179785

SPAREPART CENTER PALEMBANG
JL DR. M .ISA NO 11,DUKU,KEC. ILIR TIMUR II
KOTA PALEMBANG 30114
TELP : (0711) 7443927

SPAREPART CENTER SEMARANG
JL. DR CIPTO NO.6C RW.05
KEL. KEBON AGUNG KEC. SEMARANG TIMUR
SEMARANG 50123
TELP : (024) 86403374

SPAREPART CENTER BANJARMASIN
JL. SOETOYO S NO.155 RT.034/003
KEL.TELUK DALAM KEC. BANJARMASIN TENGAH
BANJARMASIN, KALIMANTAN SELATAN
TELP : (0511) 4245537

SPAREPART CENTER BALI
JL. GATOT SUBROTO NO.244C
KEL. TONJA KEC. DENPASAR UTARA
KOTA DENPASAR, BALI
TELP : (0361) 9077660

SPAREPART CENTER JAMBI
JL. HOS COKROAMINOTO, NO. 26 SIMPANG
KAWAT, KOTA BARU, PAYO LEBAR, JELUTUNG,
KECAMATAN JELUTUNG, KOTA JAMBI, JAMBI
36135
TELP : +62 741 3618585

POWER TOOLS

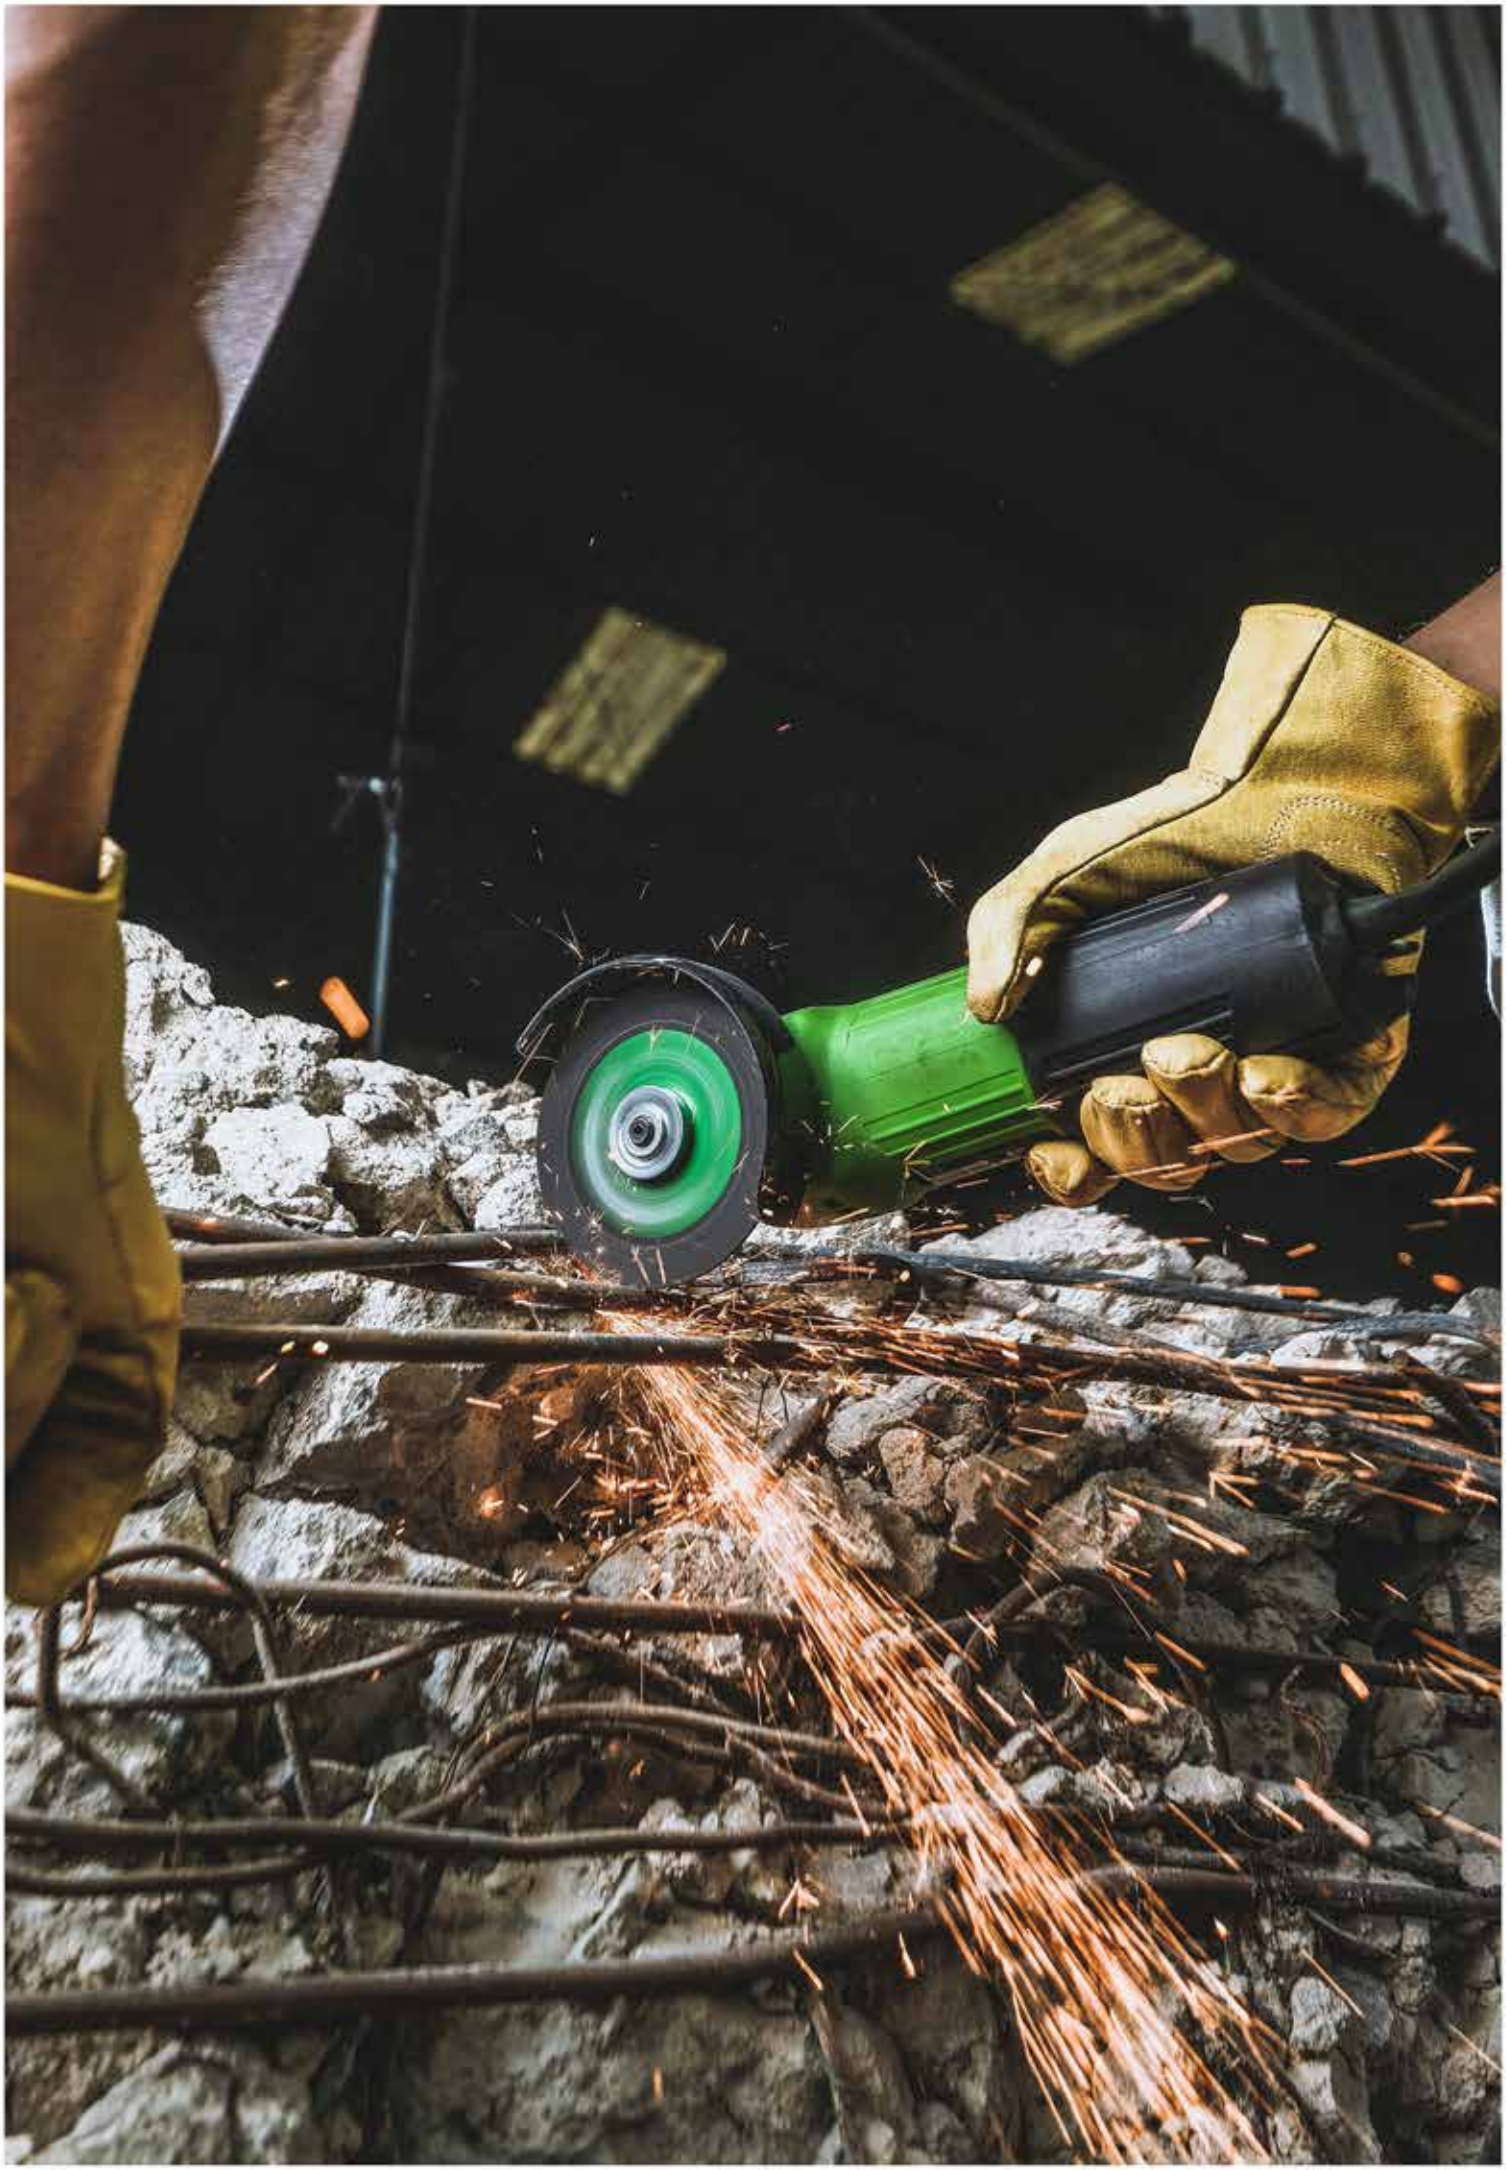

RSG100-3
ANGLE GRINDER 4"

Spindle Lock
For quick & easy change of accessories

Large Air Outlet
Improved for better performance

Maze Air Inlets
Better dustproofing and optimal air flow

With Toggel
Switch
Safe for operation
Two motion switch

Bullet Proof Guard
For maximum safety even when discs break

More Air Outlet
Optimal airflow and cooling air outlets

Powerful Motor
High Performace with 580 Watt

Selling Point Information

- Motor with High Performance
- Powerful 580W Motor
- Rotatable Housing
  Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling

SAFETY INSTRUCTION

INCLUDE : User Manual, Warranty Card, Safety Cover Guard, Key Luck Nuts, 2 Pcs Carbon Brush

TECHNICAL INFORMATION

The RSG100-3 grinder is a compact,high performance and high-quality tool for the highest demands on cutting and polishing jobs anywhere in the home, workshop and garage. equipped with a motor that is quiet but efficient in electricity usage and the selection of a quality body adds comfort when using is not slippery. equipped with Bullet Proof Guard For maximum safety even when discs break and Rear toggle switch easy to operate for user.

SPECIFICATION

Continuous rating input	: 580 W
Depressed center wheel	: 100 mm (4")
Wire cup brush	: 75 mm(2")
Abrasive disc	: 100 mm(4")
Diamond wheel	: 110 mm(4-3/8")
No Load Speed	: 11,000 rpm
Nett weight	: 1.8 Kg

RSG100-4
ANGLE GRINDER 4”

SPECIFICATION

Continuous rating input	: 580 W
Capacity	
Depressed center wheel	: 100 mm(4”)
Wire cup brush	: 75 mm(3”)
Abrasive disc	: 100 mm(4”)
Diamond wheel	: 110 mm(4-3/8”)
No Load Speed	: 11,000 rpm
Weight	: 1.9 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 2.6 A

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 22 Kg/20.5 kg
Packaging Size	: 54 cm x 29 cm x 23 cm

- Motor with High Performance
- Powerful 580W Motor
- Rotatable Housing
- Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling
- With Slider Switch

INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush

RSG100-5V
ANGLE GRINDER VARIABLE 4”

SPECIFICATION

Continuous rating input	: 840 W
Capacity	
Depressed center wheel	: 100 mm(4”)
Wire cup brush	: 75 mm(3”)
Abrasive disc	: 100 mm(4”)
Diamond wheel	: 110 mm(4-3/8”)
No Load Speed	: 0 - 11,000 rpm
Weight	: 2.4 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 3.8 A

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 22 Kg/20.5 kg
Packaging Size	: 58 cm x 36 cm x 24 cm

- Motor with High Performance
- Powerful 840W Motor
- Rotatable Housing
- Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling
- With Variable Switch

INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush

RSG125
ANGLE GRINDER 5”

INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush, Handle Grip, 1 pc Grinding Wheel 5”, 2 Pcs Cutting Wheel 5”

SPECIFICATION

Continuous rating input	: 840 W
Capacity	
Depressed center wheel	: 125 mm(5”)
Wire cup brush	: 75 mm(3”)
Abrasive disc	: 100 mm(4”)
Diamond wheel	: 110 mm(4-3/8”)
No Load Speed	: 11,000 rpm
Weight	: 2.4 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 3.8 A

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 24 Kg/22 kg
Packaging Size	: 59 cm x 36 cm x 24 cm

- Motor with High Performance
- Powerful 840W Motor
- Rotatable Housing
- Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling
- With Toggle Switch

RSG180
ANGLE GRINDER 7”

INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush, L Key, Handle Grip

SPECIFICATION

Continuous rating input	: 2200 W
Capacity	
Depressed center wheel	: 180 mm(7”)
No Load Speed	: 11,000 rpm
Weight	: 6.5 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 10 A

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 13 Kg/11 kg
Packaging Size	: 57 cm x 27 cm x 18 cm

- Motor with High Performance
- Powerful 2200W Motor
- Rotatable Housing
- Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling
- With Slider Switch

RDR10-3RE
DRILL 10MM VARIABLE

Selling Point Information

- Switch Lock
- Double Insulation
- Rubberised Grip
- Powerful, Compact and Lightweight
- Variable Speed Switches

SAFETY INSTRUCTION

INCLUDE : User Manual, Warranty Card, Key Chuck, 2 Pcs Carbon Brush

TECHNICAL INFORMATION

The RYU (UN) DRILL 10MM VARIABLE RDR10-3RE is a high performance, compact, and high quality for the highest requirements in drilling work, suitable for application in homes, workshops and garages. Equipped with variable speed control to set the desired rotation speed and a powerful motor for optimal performance and long service life. Good power transmission is guaranteed by high power and high torque motor with reversing facility.

SPECIFICATION

Drill Capacity	: 10mm
No Load Speed	: 0 - 3200 rpm
Rate Input Power	: 370 W
Rate Voltage	: 220VAC
Frequency	: 50/60Hz
Dia. Drilling in wood	: 10 mm
Dia. Drilling on iron	: 10 mm
Packaging Information	
Case Qty	: 10pcs/ctn
G.W/N.W	: 16.7Kg/15.0kg
Packaging Size	: 52.5cm x 37cm x 28cm

RID13-1RE
IMPACT DRILL

INCLUDE : User Manual, Warranty Card, Key Chuck, Handle Grip Depth Limiting Stick, 2 Pcs Carbon brush

SPECIFICATION

Drill Capacity	: 13 mm
No Load Speed	: 0 - 2,800 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7 A
Dia.Drilling in wood	: 16 mm
Dia. Drilling on iron	: 13 mm
Dia. Drilling on Beton	: 13 mm
Weight	: 2.2 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 22 Kg/20.5 kg
Packaging Size	: 55 cm x 42 cm x 28 cm

- High Speed Drilling
- High Performance Motor
- Double Insulation
- Variable Speed Switches

RID13-2RE
IMPACT DRILL

INCLUDE : User Manual, Warranty Card, Key Chuck, Handle Grip Depth Limiting Stick, 2 Pcs Carbon brush

SPECIFICATION

Drill Capacity	: 13 mm
No Load Speed	: 0 - 3200 rpm
Rate Input Power	: 710 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.2A
Dia.Drilling in wood	: 16 mm
Dia. Drilling on iron	: 16 mm
Dia. Drilling on Beton	: 13 mm
Weight	: 2.6 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 13.5 Kg/12.0 kg
Packaging Size	: 42 cm x 30 cm x 31 cm

- High Speed Drilling
- High Performance Motor
- Double Insulation
- Variable Speed Switches

RDR10-3REB
DRILL 10 MM VARIABLE SET 22 PCS

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, SDS Drill 1.5, 3, 4, 5, 6, 8 mm, Spur Bits Drill 5, 6 mm, Measurement Tape, Knife Cutter, Pencil, Two Way Screwdriver, 5 Pcs Grinding Head, Glove, Screw, Fisher

SPECIFICATION

Drill Capacity	: 10 mm
No Load Speed	: 0 - 3,200 rpm
Rate Input Power	: 370 W
Rate Voltage	: 220 VAC
Frequency	: 50/60Hz
Dia. Drilling in wood	: 10 mm
Dia. Drilling on iron	: 10 mm
Weight	: 2.4 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 12.7 Kg/10.7 kg
Packaging Size	: 45 cm x 30 cm x 29 cm

- Switch Lock
- Double Insulation
- Rubberized Grip
- Powerful, Compact and Lightweight
- Variable Speed Switches

RID13-1REB

IMPACT DRILL 13 MM SET 27 PCS

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, Masonry Drill 3, 4, 5, 6, 8 mm, SDS Drill 1.5, 3, 4, 5, 6, 8 mm, Spur Bits Drill 5, 6 mm, Measurement Tape, Knife Cutter, Pencil, Two Way Screwdriver, 5 Pcs Grinding Head, Glove, Screw, Fisher

SPECIFICATION

Drill Capacity	: 13 mm
No Load Speed	: 0 - 2,800 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7 A
Dia. Drilling in wood	: 16 mm
Dia. Drilling on iron	: 13 mm
Dia. Drilling on Beton	: 13 mm
Weight	: 3.10 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 15,5 Kg/13,5 kg
Packaging Size	: 45 cm x 30 cm x 29 cm

- High Speed Drilling
- High Performance Motor
- Double Insulation
- Variable Speed Switches

RRH26

ROTARY HAMMER

INCLUDE : User manual, Warranty Card, Handle Grip, Depth Limiting Stick, SDS Plus 8MM,10MM,12MM, 1 Pc SDS Plus Pointed Chisel, 1 Pc SDS Plus Flat Chisel

SPECIFICATION

Chuck Capacity	: 26 mm
No Load Speed	: 0 - 1,500 rpm
Input Power	: 850 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.8A
Weight	: 5.3 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 21.5 Kg/19.5 kg
Packaging Size	: 46 cm x 43 cm x 30 cm

- Sliding Lock Chuck
- High Performance Motor
- Double Insulation
- Multi-Function knob

RRH32

ROTARY HAMMER

INCLUDE : User Manual, Warranty Card, Handle Grip, Depth Limiting Stick, 1 PC Hexagon Flat Chisel

SPECIFICATION

Chuck Capacity	: 32 mm
Impact Rate	: 800 bpm
Input Power	: 1050 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.7A
Weight	: 7.6 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 23 Kg/21kg
Packaging Size	: 53 cm x 38 cm x 36 cm

- Sliding Lock Chuck
- High Performance Motor
- Double Insulation
- Multi-Function knob

RDH15
DEMOLITION HAMMER

INCLUDE : User Manual, Warranty Card, Handle Ggrip, Depth Limiting Stick, 2 Pcs Carbon Brush, Key Chuck, L Key, 1 Pc Hexagon Pointed Chisel, 1 Pc Hexagon Flat Chisel

SPECIFICATION

Input Power	: 1200 W
Impact Rate	: 2,900 bpm
Impact Energy	: 15J
Voltage	: 220VAC
Frequency	: 50/60Hz
Ampere	: 5.4A
Weight	: 9.8 kg

Packaging Information

Case Qty	: 3pcs/ctn
G.W/N.W	: 29.5Kg/27.5kg
Packaging Size	: 52 cm x 38 cm x 34 cm

- High Performance Motor
- Double Insulation
- 15% higher impact energy for high discharge rates
- Strong impact body

RDH50
DEMOLITION HAMMER

INCLUDE : User ManuaL, Warranty Card, Handle Grip, 2 Pcs Carbon Brush, Key Chuck, L Key, 1 Pc Pointed Chisel

SPECIFICATION

Input Power	: 1400 W
Impact Rate	: 1,400 bpm
Impact Energy	: 50J
Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 6.3A
Weight	: 19 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 19 Kg/17 kg
Packaging Size	: 71 cm x 17.5 cm x 30 cm

- High Performance Motor
- Double Insulation
- 15% higher impact energy for high discharge rates
- Strong impact body

RMD23
MAGNETIC DRILL 23 MM

INCLUDE : User Manual, Warranty Card, Handle Grip

SPECIFICATION

Drill Capacity	: 23 mm
No Load Speed	: 300 rpm
Rate Input Power	: 1000 W
Max. Power Magnet	: 12.500 N
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.5 A
Weight	: 31 kg

Packaging Information

Case Qty	: 1pcs/ctn
G.W/N.W	: 29 Kg/25 kg
Packaging Size	: 41 cm x 21 cm x 46 cm

- High magnetic strength
- High Performance Motor
- Double Insulation
- Comfortable Handle

RMD28
MAGNETIC DRILL 28 MM

INCLUDE : User Manual, Warranty Card, Handle Grip

SPECIFICATION

Drill Capacity	: 28 mm
No Load Speed	: 270 rpm
Rate Input Power	: 1100 W
Max. Power Magnet	: 14.000 N
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5A
Weight	: 32 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 32 Kg/30 kg
Packaging Size	: 40.5 cm x 20 cm x 45 cm

- High magnetic strength
- High Performance Motor
- Double Insulation
- Comfortable Handle

RMD32
MAGNETIC DRILL 32 MM

INCLUDE : User Manual, Warranty Card, Handle Grip

SPECIFICATION

Drill Capacity	: 32 mm
No Load Speed	: 190 rpm
Rate Input Power	: 1200 W
Max. Power Magnet	: 18.000N
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.4A
Weight	: 52 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 50 Kg/45 kg
Packaging Size	: 55 cm x 24 cm x 58 cm

- High magnetic strength
- High Performance Motor
- Double Insulation
- Comfortable Handle

RBD13
BENCH DRILL 13 MM

INCLUDE : User Manual, Warranty Card, 3 Pcs Handle Grip, L Key, Head Chuck

SPECIFICATION

Drill Capacity	: 1.5 - 13 mm
No Load Speed	: 740 - 3140 rpm
Rate Input Power	: 350 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.5 A
Size Table	: 160 mm X 160 mm
Height	: 580 mm
Weight	: 14.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 21.5 Kg/14.5 kg
Packaging Size	: 46.5 cm x 34 cm x 25.3 cm

- 100% Copper
- 1/2” (13mm) Max. Chuck Capacity
- 210mm Swing
- 5 Spindle Speeds & 45° Table Tilt L&R

RBD16
BENCH DRILL 16 MM

INCLUDE : User Manual, Warranty Card, 3 Pcs Handle Grip, L Key, Head Chuck

SPECIFICATION

Drill Capacity	: 3 - 16 mm
No Load Speed	: 220 - 3320 rpm
Rate Input Power	: 550 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.5 A
Size Table	: 290 MM
Height	: 980 mm
Weight	: 40 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 36.5 Kg/33 kg
Packaging Size	: 78 cm x 46 cm x 26.5 cm

- 100% Cooper
- 5/8” (16mm) Max. Chuck Capacity
- 325mm Swing
- 16 Spindle Speeds & 45° Table Tilt L&R

RC0180
CUT OFF SAW

SPECIFICATION

No Load Speed	: 5,000 rpm
Diameter Wheel	: 180mm (7”)
Rate Input Power	: 900 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.0 A
Weight	: 6.2 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 25.14 Kg/23.92 kg
Packaging Size	: 51.8 cm x 40.5 cm x 52 cm

- Great Cutting Efficiency
- Steady Structure, Perfect Wheel Cover Design
- Widen and Thicken Base for Better Stability

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, L Key, 2 Pcs Base Plate Disc, Key Lock Nuts.

RC0355-1
CUT OFF SAW

SPECIFICATION

No Load Speed	: 3,800 rpm
Diameter Wheel	: 355 mm (14”)
Rate Input Power	: 2000 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 9.0A
Weight	: 17. 5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 17.5 Kg/16.5 kg
Packaging Size	: 56 cm x 32.5 cm x 40.5 cm

- 100% Copper Wire Motor
- Great Cutting Efficiency
- Trigger Switch with Lock-Off Button
- Steady Structure, Perfect Wheel Cover Design
- Widen and Thicken Base for Better Stability

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, L Key, Key Lock Nuts.

RCS185-2
CIRCULAR SAW

Power Trigger
Easy for operation

Ergonomic Handle
Angle for ease in pushing the saw forward

Upper Guard With Hole
For maximum safety even when discs break and easy connect to hose vaccum

Rigid Steel Base
Provides smooth cutting because of toughness, bend resistance, lightweight and durability

Powerful Motor
High Performance with 1000 Watt

Bevel Adjustment Up To 45 Degrees
Allow quick bevel cuts in difficult situations

Depth Lock Knob
For quick & easy tightening

Blade Cover
Automatically protects the blade after wear and storage

Tilt cutting 0-45°
High Performance Motor
Chisel tooth combination blade
Twice cutting processed gear, lowest noise

Selling Point Information

- High Performance Motor
- Twice Cutting Processed gear, Lowest Noise
- Chisel Tooth Combination Blade

SAFETY INSTRUCTION

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, Guide Bar, Blade 7"

TECHNICAL INFORMATION

The RYU (UN) CIRCULAR SAW RCS185-2 is a high performance, compact and high quality for the highest requirements in cutting jobs, suitable for applications in homes, workshops and garages. equipped with reliable bevel adjustment up to 45° in difficult cutting positions, powerful motor for optimal performance and long service life.

SPECIFICATION

Blade Diameter	: 185 mm
No Load Speed	: 4,500 rpm
Rate Input Power	: 1300 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.9 A

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 17 Kg/15 kg
Packaging Size	: 47 cm x 30 cm x 39 cm

RCS185-1
CIRCULAR SAW

SPECIFICATION

Blade Diameter	: 185 mm
No Load Speed	: 5,000 rpm
Rate Input Power	: 1000 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.5 A

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 17 Kg/15 kg
Packaging Size	: 47 cm x 30 cm x 39 cm

- High Performance Motor
- Twice Cutting Processed gear, Lowest Noise
- Chisel Tooth Combination Blade

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, Guide Bar, Blade 7”

RRT12-1
ROUTER

SPECIFICATION

No Load Speed	: 23,000 rpm
Size Collet	: 1/2”
Rate Input Power	: 930 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.2 A
Weight	: 5 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 15 Kg/14 kg
Packaging Size	: 62 cm x 35 cm x 23 cm

- Double Insulation
- High performance Motor
- Adjustable Depth Button
- Double Transparent Protection Mantles
- Table Tilt L&R

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, 2 Pcs Key Pass, Guide Set.

RJS65-1E
JIG SAW

SPECIFICATION

No Load Speed	: 500 - 3,100 rpm
Rate Input Power	: 450 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2A
Depth of cut wood	: 65 mm
Depth of cut iron	: 3.0 mm
Depth of cut aluminum	: 1.6 mm
Weight	: 2.4 kg

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 14.5 Kg/12.5 kg
Packaging Size	: 53.5 cm x 28 cm x 25 cm

- Double Insulation
- High performance Motor
- With Laser
- Variable Speed
- Change level for 3 orbital setting and
- straight cutting

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, L Key, Guide Set, 1 Pcs Blade

RTS8
TABLE SAW 8”

INCLUDE : User Manual, Warranty Card, Guide Bar, Push Stick, Blade 8”, Key Set.

SPECIFICATION

No Load Speed	: 2,960 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7A
Size Table	: 500 mm X 335 mm
Size Saw Blade	: 16 X 2.4 mm
Depth Cutting	: 45 mm (90°) – 27 mm (45°)
Weight	: 10.8 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12 Kg/11 kg
Packaging Size	: 52.3 cm x 35 cm x 26 cm

- Built-in dust extraction
- Adjustable Rip fence for direct and miter cuts
- Single Phase Induction Motor with Protection

RTS10
TABLE SAW 10”

INCLUDE :User Manual, Warranty Card, Guide Bar, Push Stick, Blade 8”, Key Set

SPECIFICATION

No Load Speed	: 2,960 rpm
Rate Input Power	: 2000 W
Rate Voltage	: 220 VAC
Frequency	: 50/60Hz
Ampere	: 9A
Power Laser	: 1 mW
Size Table	: 630 mm X 445 mm
Size Saw Blade	: 2.8 mm
Blade Teeth	: 24/28
Depth Cutting	: 73 mm (90°) – 63 mm (45°)
Weight	: 23.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 24 Kg/23 kg
Packaging Size	: 66.7 cm x 53 cm x 34 cm

- Strong and stable steel machine cabinet
- Quick lock device and fine adjustable handle
- Quick designed ripping fence with magnifying glass

RBS8
BAND SAW 8”

INCLUDE : User Manual, Warranty Card, Guide Bar, Push Stick, Blade.

SPECIFICATION

Blade Speed	: 900 rpm
Rate Input Power	: 350 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.5A
Size Table	: 300 mm X 300 mm
Size Blade	: 1430 X 10 X 6T
Max. Cutting Thickness	: 85 mm
Weight	: 17.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 17.5 Kg/15.6 kg
Packaging Size	: 75 cm x 39.5 cm x 28.5 cm

- Low vibration Induction Motor
- Tilling table up to 45°
- Easy Adjust Pully Alignment
- Supplied with a high quality blade
- More Precise with aluminum rip fence

RTR6-1
WOOD TRIMMER

SPECIFICATION

No Load Speed	: 30,000 rpm
Size Collet	: 1/4”
Rate Input Power	: 440 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2A
Max. Depth	: 30 mm
Weight	: 5 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 15 Kg/14 kg
Packaging Size	: 62 cm x 35 cm x 23 cm

- Transparent Bottom
- High performance Motor
- Small Convenient Operation

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, 2 Pcs Key Pass, Guide Set,

RSS125
SCROLL SAW 125 MM

SPECIFICATION

Vacum Speed	: 1400/min
Rate Input Power	: 120 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.5A
Base/Surface	: 405 mm
Cutting Capacity	: 50 mm
Disk	: 125 mm 15/18TPI
Inclination	: 0 - 45°
Type of insulation	: Class 1
Weight	: 12 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12,7 Kg/12kg
Packaging Size	: 65 cm x 33 cm x 35.4 cm

- Magnetic motor with LED work Light
- Portable handle design
- Cast iron base
- Variable speed design

INCLUDE : User Manual, Warranty Card,

RMS180
MITER SAW 7”

SPECIFICATION

No Load Speed	: 5,500 rpm
Diameter Saw Blade	: 185 mm/7”
Rate Input Power	: 900 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4 A
Max. Cutting Capacity	: 210 x 60 mm
Blade size	: 185 x 25.4 x 24T
Weight	: 6.4 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 6.4 Kg/5.4 kg
Packaging Size	: 49 cm x 31cm x 28.5 cm

- Strong and stable steel machine cabinet
- Quick lock device and fine adjustable handle
- Quick designed ripping fence with magnifying glass

INCLUDE : User Manual, Warranty Card, Clam Set, 1 Pcs Blade

RMS180-1
MITER SAW 7” (SLIDING)

INCLUDE : User Manual, Warranty Card, Clam Set, 1 Pcs Blade

SPECIFICATION

No Load Speed	: 4,500 rpm
Diameter Saw Blade	: 185 mm/7”
Rate Input Power	: 1650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 7.5 A
Max. Cutting Capacity	: 210 x 60 mm
Blade size	: 185 x 25.4 x 24T
Weight	: 10 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12,6 Kg/10 kg
Packaging Size	: 65,6 cm x 45,2 cm x 38,9 cm

- Aluminum work-table, made at aluminum alloy designed for secure grip
- Ergonomic Designed D-Handles with Soft Grip for Improved comfort
- Transparent lower guard for additional safety

RMS255
MITER SAW 10”

INCLUDE : User Manual, Warranty Card, Clam Set, 1 Pcs Blade

SPECIFICATION

No Load Speed	: 4,800 rpm
Diameter Saw Blade	: 255 mm/10”
Rate Input Power	: 1650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 7.5 A
Max. Depth	: 30 mm
Weight	: 12.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12.5 Kg/11.5 kg
Packaging Size	: 44 cm x 57 cm x 44 cm

- 100% Copper wire motor for powerful performance
- D-handle design for easy and comfortable design
- Heavy Duty Aluminum Base ensures accurate cuts
- Shaft lock for easy blade changes

RMC110-2
MARBLE CUTTER 110 MM

INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1 Pc L Key, Guide Set.

SPECIFICATION

No Load Speed	: 0 - 13,000 rpm
Saw Blade	: 110 mm
Cutting Depth (90°)	: 34 mm
Cutting Depth (45°)	: 22 mm
Rate Input Power	:1200 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.4A
Weight	: 3.5 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 14 Kg/12 kg
Packaging Size	: 48 cm x 30.5 cm x 40 cm

- Double Insulation
- High Performance Motor
- Dry wet amphibious cutting
- Cut stone, ceramic tile, Marble, Concrete

RYU

RPL82-3A
PLANNER

Selling Point Information

- Double Insulation
- Strong and lightweight
- Precision work efficiency
- Switch Lock
- Ergonomic Handle

SAFETY INSTRUCTION

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush

TECHNICAL INFORMATION

The RYU (UN) PLANNER RPL82-3A is a planer or planer machine that functions to flatten or shrink the surface of the wood to become smooth. PLANNER RPL82-3A engine produced by the RYU factory, this machine has an electric power of 570 Watts and a no-load speed of 15000 rpm. 82mm flatten surface width to 1mm depth. A compact and powerful machine suitable for all heavy work, be it construction, making doors and furniture, furniture, hobbies, and others.

SPECIFICATION

Rate Input Power	: 570 W
Rate Voltage	: 220 V±15%V
Frequency	: 50/60 Hz
No Load Speed	: 0 - 15000 rpm
Planing width	: 82 mm
Planing depth	: Max. 2.5 mm
Weight	: 3.3 kg
Packaging Information	
Case Qty	: 6 pcs/ctn
G.W/N.W	: 20.0Kg/19.0 kg
Packaging Size	: 53.0 cm x 33.0 cm x 36.5 cm

RPS110
PALM SANDER 110 X 100 MM

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush.

SPECIFICATION

No Load Speed	: 12,000 rpm
Rate Input Power	: 170 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.7A
Cashion Size	: 110 x100 mm
Weight	: 1.5 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 15 Kg/13 kg
Packaging Size	: 62 cm x 20.5 cm x 31cm

- Double Insulation
- One-handed Operation
- High Performance Motor
- External carbon brushes

ROS13-1A
ORBITAL SANDER

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush

SPECIFICATION

No Load Speed	: 10,000 rpm
Rate Input Power	: 180 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.8A
Sandpaper Size	: 180 x 90 mm
Weight	: 1.9 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 19 Kg/18 kg
Packaging Size	: 52 cm x 32 cm x 34 cm

- Double Insulation
- Simple Sandpaper Clip
- High Performance Motor
- External carbon brushes

RGT350
GRASS TRIMMER

INCLUDE : User Manual, Warranty Card, Safety Cover, Wire Blade

SPECIFICATION

No Load Speed	: 12,000 rpm
Rate Input Power	: 350 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.5A
Working Width	: 250 mm
Height Setting	: 0 – 120 mm
Round Cut	: 180°
Weight	: 2.5kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 10 Kg/8 kg
Packaging Size	: 94 cm x 44 cm x 24,5 cm

- Double Insulation
- Work Fast with Light on the Front
- High Performance motor
- The most Suitable Tools grinding Work

RVC15
VACUUM CLEANER

INCLUDE : Uuser Manual, Warranty Card, 3 Pcs Shock Adjuster Pipe, 3 Type Nozzle Set

SPECIFICATION

No Load Speed	: 10,000 rpm
Rate Input Power	: 650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.9A
Suction Power	: 18 KPA
Weight	: 4.8 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 4.80 Kg/4.50 kg
Packaging Size	: 52 cm x 35.2 cm x 34 cm

- Powerful Suction
- Blow Function
- Powerful Motor
- Strong Plastic Tank
- 15 L Tank Capacity

RED16RE
ELECTRIC DRILL MIXER 16 MM

INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Chuck, 1 Pc Head Chuck 16 mm. 2 Model Handle

SPECIFICATION

No Load Speed	: 1,200 rpm
Chuck Capacity	: 16 mm
Rate Input Power	: 950 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.3 A
Weight	: 4.9 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 27.7 Kg/27.3 kg
Packaging Size	: 47 cm x 21 cm x 29 cm

- Full 360° Rotatable D-handle with 24-Positive Stop for
- Multi-position Operation
- High Continuous rating Input
- Aluminum Housing is More Durable
- Lock-on Switch for More Safety and easier

RYU

RSE800
SPRAY GUN ELECTRIC 800 ML

INCLUDE : User Manual, Warranty Card, 1 Pc Sprayer, 2 Pcs Seal Tank

SPECIFICATION

No Load Speed	: 3,000 rpm
Rate Input Power	: 450 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2 A
Size Nozzle	: 2.6 mm
Flow Rate	: 740 ml/min
Air Pressure	: 13 kpa
Container Capacity	: 800 ml
Weight	:1.5 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 6,6 Kg/6 kg
Packaging Size	: 54 cm x 28.5 cm x 29 cm

- High Volume low pressure
- Waterproof “ON/OFF” switch
- Vertical fan, horizontal fan and around
- Accessories : viscosity cup

RSE800-1
SPRAY GUN ELECTRIC 800-1 ML

INCLUDE : User Manual, Warranty Card

SPECIFICATION

No Load Speed	: 3,000 rpm
Rate Input Power	: 650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.9A
Size Nozzle	: 2.4 mm
Flow Rate	: 740 ml/min
Air Pressure	: 13 kpa
Container Capacity	: 800 ml
Extension Length	: 160 cm
Weight	: 1.6 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 10 Kg/9,3 kg
Packaging Size	: 47.5 cm x 36.5 cm x 42 cm

- High Performance Motor
- Flexible Electric Spray Gun
- With Double Nozzle

RWP25DC
WATER PUMP 25 DC

INCLUDE : User Manual, Warranty Card, Elbow Hose

SPECIFICATION

No Load Speed	: 5,800 rpm
Power Motor	: 50 W
Voltage	: 12 VDC
Volume Output	: 63 L/min
Diameter Outlet	: 25 mm/1”
Delivery Head	: 4 m
Frequency	: 50/60 Hz
Ampere	: 4.1A
Water Temperature	: 0 – 60°C
Weight	: 1.1 kg

Packaging Information

Case Qty	: 20 pcs/ctn
G.W/N.W	: 23,5 Kg/22,5 kg
Packaging Size	: 52 cm x 27,5 cm x 40 cm

- Large Delivery Volume and Pressure
- Small Size light compact and easy to handle
- Easy to cleaner

REW10
ELECTRIC WRENCH 10 MM

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush

SPECIFICATION

Hex Shank	: 10 mm
No Load Speed	: 0 - 3,600 rpm
Rate Input Power	: 230 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.0 A
Weight	: 1.45 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 14.5 Kg/12.5 kg
Packaging Size	: 55 cm x 38.5 cm x 23 cm

- High-Speed Drilling
- Variable Speed Switch
- Externally Accessible Carbon Brush
- Powerful Maximum Torque of 100N.m

RCC12
MINI AIR COMPRESSOR 12V

INCLUDE : User Manual, Warranty Card, Lightning Cable

SPECIFICATION

Voltage	: 12 V
Working Pressure	: 8.3 Bar
Max. Pressure	: 120 psi
Air Flow Rate	: 40 L/Min
Length Cable	: 3.5 m
Weight	: 0.9 kg

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 6,8 Kg/6,2 kg
Packaging Size	: 46.5 cm x 18.5 cm x 24.5 cm

- 12V Adaptor
- Extra Long 3.5M Power Cable
- Easy to Read Digital Pressure Gauge
- Pressure Hose

RMT6
MULTI TOOL SET 6 PCS

INCLUDE : User Manual, Warranty Card, 1 Pc L Key, 1 Pc Triangular EVA Sending Pad, 1 Pc Segment HSS Saw, 1 Pcs Curved Scroper Blade, 1 Pc Scroper, 6 Pcs Triangle Sand Paper.

SPECIFICATION

No Load Speed	: 6,000 – 20,000 rpm
Rate Input Power	: 320 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.4 A
Angle Left/Right	: 1.6” – 3.2”
Safety Class	: II
Weight	: 2.3 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 10,8 Kg/8,8 kg
Packaging Size	: 52 cm x 37 cm x 23 cm

- Oscillation Up to 20.000rpm
- More Stable with Oscillating Angle 3.2”
- Various Accessories Available

RDG3.2
MINI DIE GRINDER 3.2 MM

INCLUDE : User Manual, Warranty Card, Flexible Extension, Key Chuck, L Key

SPECIFICATION

No Load Speed	: 8,000 – 32,000 rpm
Rate Input Power	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.6A
Max. Drilling Diameter	: 3.2”
Safety Class	: II
Weight	: 1.4 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 8 Kg/7 kg
Packaging Size	: 45 cm x 32 cm x 20 cm

- Mini Drill Type
- Drilling Diameter 3.2 (Max)
- No Load Speed 8000-32000rpm

RDG6-1
DIE GRINDER 6 MM

INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, 2 Pcs Key Pas, 3 Pcs Mounted Stone

SPECIFICATION

No Load Speed	: 28,000 rpm
Rate Input Power	: 750 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.4 A
Tube Diameter	: 6 mm
Safety Class	: II
Weight	: 2.3 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 23 Kg/21,8 kg
Packaging Size	: 43 cm x 44 cm x 26 cm

- Double Insulation
- Work Fast with Light on the Front
- High Performance motor
- The most Suitable Tools grinding Work

RYU

RPW70-1
PRESSURE WASHER
70 BAR

One-Push Hand Grip
More Comfortable to used

Powerful Motor
- High Performance with 700 Watt
- Built-in Thermal Protector
- Total Stop System

Tempered stainless steel plungers

Nozzle
Variable Nozzle Gun and Lance

Light Weight and handle for Easy Movement

Rotary ON/OFF Switch
For Convenient use

High Pressure Hose with a length of 5 meters

3 Axial -Piston Wobble -plate pump

Selling Point Information

- With 700 W Power
- 70-Bar Max Pressure
- 330L Rate Flow/Hour
- Variable Nozzle Gun and Lance
- Automatic Total Stop System

INCLUDE : User Manual, Warranty Card, Gun And Nozzle Set, Pressure Hose

TECHNICAL INFORMATION

The RYU (UN) PRESSURE WASHER 70 BAR is a cleaning equipment that uses high pressure water to clean a wide surface. Very effectively used to clean dirt deposits, stubborn dirt, and moss and mold that sticks. Portable shape design and included handle for easy movement. Equipped with a total stop system when not in use.
the engine automatically shuts down and thermal protection to prevent overheating and increase engine life. Ideal for cleaning the surfaces of parks, garages, walls, cars and other outdoor equipment where dirt is very difficult to clean.

SPECIFICATION

Rate Input Power	: 700 W
Rate Voltage	: 220-240 VAC
Frequency	: 50/60 Hz
Motor type	: Carbon Brush
Max. delivery rate	: 330 (l/h)
Max. pressure	: 70 bar
Weight	: 5.6 kg
Packaging Information	
Case Qty	: 1pc/ctn
G.W/N.W	: 6.0Kg/4.6 kg
Packaging Size	: 28.5cm x 23 cm x 373 cm

RGP125E
GUN POLISHER

A005532

INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1Pc 5" Pad Polisher Set, Handle Grip

SPECIFICATION

No Load Speed	: 1,600 – 4,000 rpm
Rate Input Power	: 440 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2A
Disc Diameter	: 125mm (5")
Weight	: 2 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 20 Kg/18 kg
Packaging Size	: 55 cm x 43 cm x 29 cm

- High Performance Motor
- Double Insulation
- Adjust the Speed at Preset

RGP180E
GUN POLISHER

A005532

INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1 Pcs 7" Pad Polisher Set, Handle Grip

SPECIFICATION

No Load Speed	: 600 – 2,000 rpm
Rate Input Power	: 900 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4 A
Disc Diameter	: 180 mm
Weight	: 3 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 9 Kg/8 kg
Packaging Size	: 40 cm x 33 cm x 26 cm

- High Performance Motor
- Double Insulation
- Adjust the Speed at Preset

RPO180-1E
ANGLE POLISHER 7"

A005532

INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1 Pcs 7" Pad Polisher Set. 2 Model Handle

SPECIFICATION

No Load Speed	: 660 – 3,000 rpm
Rate Input Power	: 1200 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.4A
Disc Diameter	: 180 mm
Weight	: 4.3 kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 8.6 Kg/7.6 kg
Packaging Size	: 47 cm x 21 cm x 29 cm

- High Performance Motor
- Double Insulation
- Adjust the Speed at Preset

RWG700
PLASTIC WELDING

INCLUDE : User Manual, Warranty Card, Nozzle

SPECIFICATION

Rate Input Power	: 700 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.1A
Gas Flow	: 50 - 400
Temperature	: 50 - 400°C

Packaging Information

Case Qty	: 20 pcs/ctn
G.W/N.W	: 14 Kg/12 kg
Packaging Size	: 51 cm x 35 cm x 40 cm

- Universal fit for repairs plastic components
- Incredibly adhesive
- Compact design, easy to use and carry

RHG600-3
HEAT GUN

INCLUDE : User Manual, Warranty Card, 2 Pcs Flow Holder

SPECIFICATION

No Load Speed	: 210-250 / 340-380L/m
Rate Input Power	: 1800 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 8.1A
Temperature Control	: 2 Position
Temperature Selection	: 50-350°/50-600°
Weight	: 0.85 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 10.5 Kg/7.5 kg
Packaging Size	: 45 cm x 29 cm x 51 cm

- More Durable & Powerful
- Hanging Hook for Easy Storage
- Over-Heat Protection

RBL25-1
BLOWER

INCLUDE : User Manual, Warranty Card

SPECIFICATION

No Load Speed	: 16,000 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7A
Volume Air Flow	: 0 – 2.8m3/min
Blade size	: 185 x 25.4 x 24T
Weight	: 2.3 kg

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 14 Kg/12 kg
Packaging Size	: 62 cm x 28 cm x 42 cm

- Double Insulation
- Speed Control switch
- Light & Easy to carry
- High Performance Motor
- Sucking & Blowing Function

CORDLESS

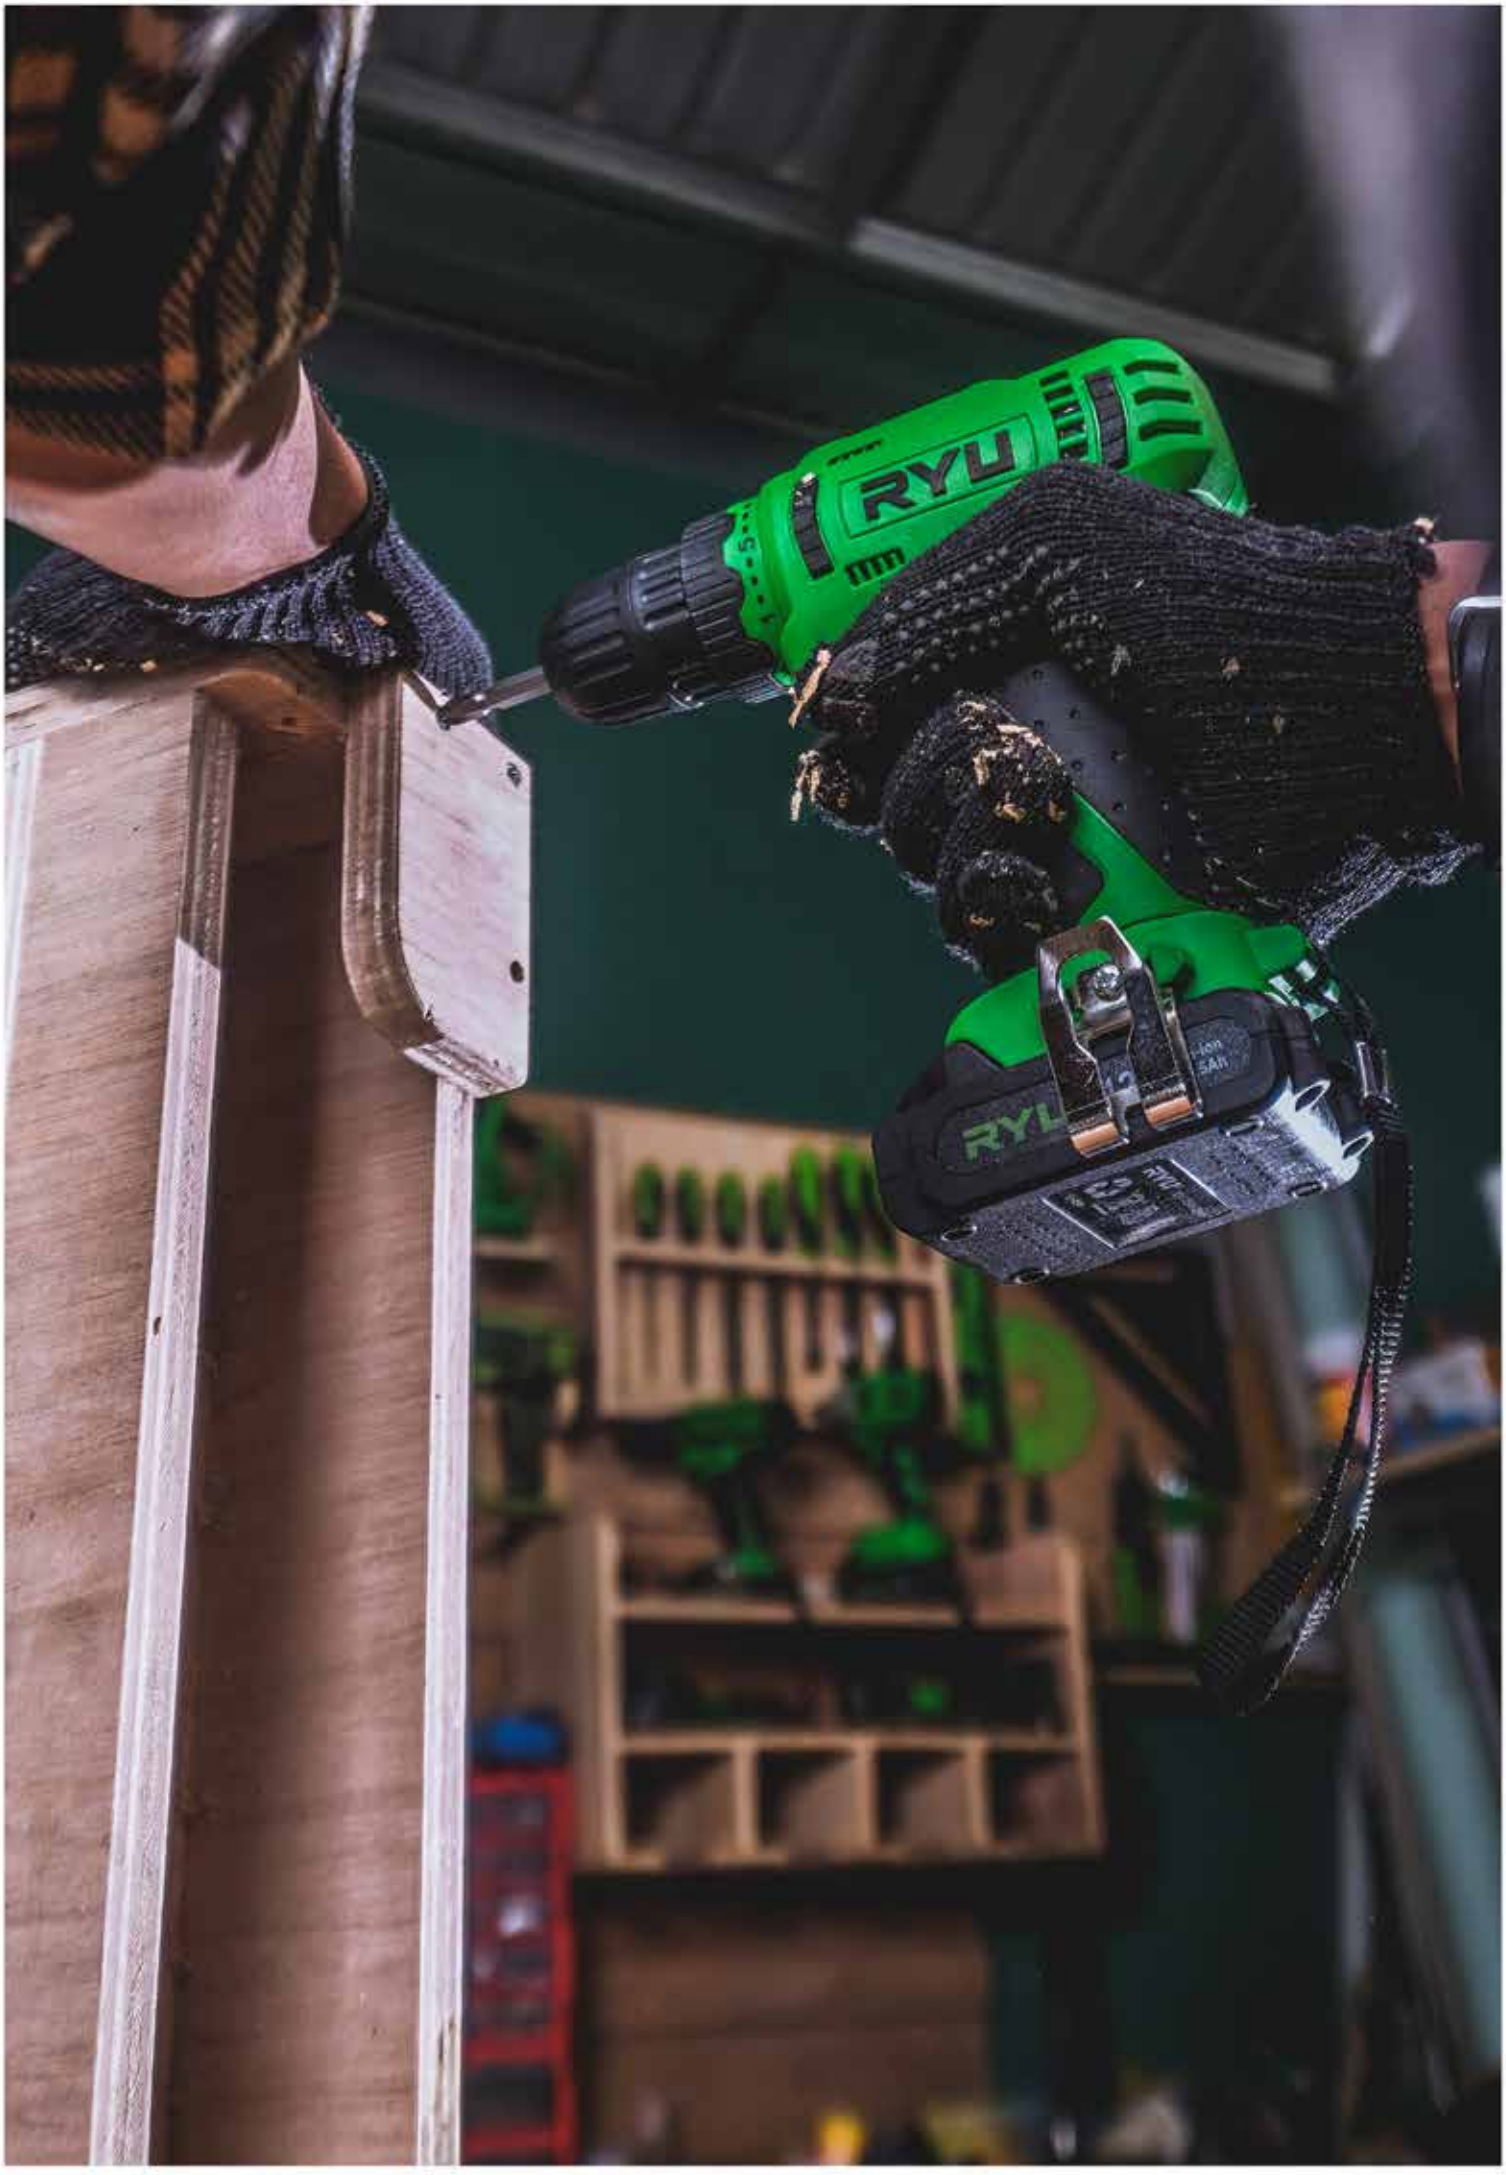
RYU

RCD12V
CORDLESS 12V

Torque setting ring
Widerr torque range of 1-10N.m in clutch mode allows for versatile applications

Single sleeve keyless chuck
Allow for quick and easy bit installation/removal by one hand

Mechanical 2-speed gearing

Maze Air Inlets
Better dustproofing and optimal air flow

To provide maximum boost to the bit, the top back of the handle is ergonomically calculated and widened to fit comfortably into the u-shape that forms between the user's thumb and index finger

All metal gear constructionttery fuel gauge
For extra-high performance durability

Forward and Reverse Button

With LED Job light
helps lighting in low light work conditions

Ribbed sofy grip
Using quality materials and providing comfort allows all fingertips to hold the handle securely against the strong rotational forces of counter torque even in one-handed operation

Variable speed control by trigger

Belt clip

battery indicator gauge

Powered by 12V Li-ion battery 1,5Ah

Selling Point Information

- Built-in LED light for work in dark areas.
- 1 Hour quick battery charger.
- Two spped powder metallurgy gearbox.
- Lithium-ion providers longer run time.
- Quick charger chuck

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card, Charger, 2 Pcs Battery

TECHNICAL INFORMATION

The RCD12V cordless drill/screwdriver is a high quality, high performance and compact tool for the highest demands on drilling and screwdriving jobs everywhere in the home,workshop andgarage. The lithium ion battery has a battery management system for optimum control and long battery life. Good power transmission is assured by the high power and high torque motor and a robust two-speed metal gearing with reversing facility.

SPECIFICATION

Charging time	: 1 h
Number of gear	: 2
Idle speed (gear 1)	: 0-350 rpm
Idle speed (gear 2)	: 0-1300 rpm
Max torque hard	: 24 N.m
Number of torque steps	: 18 settings
Drill chuck	: 10 mm I 3/8”
Nett weight	: 1.05 kg
Gross weight	: 2.4 kg

RCD4.8V

USB CORDLESS 4.8V WITH USB CHARGER

INCLUDE : User Manual, Warranty Card, Charger Cable

SPECIFICATION

Voltage	: 4.8 V I 1.3 Ah I Liion
Charging time	: 2 h
Idle speed (gear 1)	: 0-200 rpm
Max torque hard	: 5 N.m
Number of torque steps	: 10 +1 settings
Drill chuck Iron Capacity	: 6 mm
Drill chuck Wood Capacity	: 6 mm
Weight	: 1.3 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 6.5 Kg/6 kg
Packaging Size	: 46.5 cm x 23 cm x 19 cm

- 60° Swivelling Handle
- USB Charger + LED Torch
- 10 + 1 Torque Setting
- Ergonimic Handle

RCD4.8V-1

USB CORDLESS 4.8V-1

INCLUDE : User Manual, Warranty Card, Charger

SPECIFICATION

Voltage	: 4.8 V I 1.3 Ah I Li-ion
Charging time	: 3 h
Idle speed (gear 1)	: 0-200 rpm
Max torque hard	: 3 N.m
Number of torque steps	: 10 +1 settings
Drill chuck Iron Capacity	: 6 mm
Drill chuck Wood Capacity	: 6 mm
Weight	: 0.8 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 8.5 Kg/8kg
Packaging Size	: 47 cm x 33 cm x 23.5 cm

- Charging Time : 3 Hours
- Soft Grip for Comfort
- 24 Pcs Bits
- Ergonimic Handle

RCD12V-1

CORDLESS DRILL 12V-1

INCLUDE : User Manual, Waranty Card, Charger, Screwdriver Bit

SPECIFICATION

Voltage	: 12 V I 1.5 Ah I Li-ion
Charging time	: 1 h
Number of gear	: 2
Idle speed (gear 1)	: 0-350 rpm
Idle speed (gear 2)	: 0-1,300 rpm
Drill chuck Iron Capacity	: 10 mm
Drill chuck Wood Capacity	: 10 mm
Number of torque steps	: 18 settings
Drill chuck	: 10 mm I 3/8”
Net weight	: 0.92 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	:12.8 Kg/10.8 kg
Packaging Size	: 42 cm x 37 cm x 23.5 cm

- More easier with Switch Lock
- Comfortable Rubberized Grip
- Powerful, Comfort and Light Weight
- Variable Speed Switches

RCI20V
CORDLESS IMPACT DRILL 20V

SPECIFICATION

Voltage	: 20 V I 1.5 Ah I Li-ion
Charging time	: 1 h
Impact rate	: 0- 3.000/ipm
Drill chuck Iron Capacity	: 10 mm
Drill chuck Wood Capacity	: 10 mm
Max Torque	: 32 Nm
Number of torque steps	: 18 settings
Drill chuck	: 10 mm I 3/8”
Net weight	: 3.14 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 17.2 Kg/15.2 kg
Packaging Size	: 57 cm x 35.5 cm x 30 cm

- Built-in LED Light for Work in Dark Areas
- Comfortable Rubberized Grip
- 1Hour Quick Time battery Charger
- Variable Speed Switches

INCLUDE : User Manual, Warranty Card, Charger, Screwdriver Bit Set, Drill Bit Wood 4,5,6 mm, Masonry 4,5,6 mm, Shock 5-13 mm, Flexibel Stick.

RCG7
CORDLESS GLUE GUN 7 MM

SPECIFICATION

Input Power	: 12 W
Voltage	: 3.7 V
Flow of Glue	: 8-10 M/G
Preheat Time	: 15 sec
Battery Capacity	: 1500 mAh
Size Stick	: 7 mm
Weight	: 0.5 kg

Packaging Information

Case Qty	: 20 pcs/ctn
G.W/N.W	: 10.8 Kg/9.4kg
Packaging Size	: 57 cm x 22.5 cm x 34 cm

- Quick Dry
- Easy Charging
- Quick Start 15 Sec
- Constant Electronic

INCLUDE : User Manual, Warranty Card, 2 Pcs Glue Stick, Charger, Charger Cable.

RCW3.6
CORDLESS WINDOW CLEANER 3.6 V

SPECIFICATION

Voltage	: 3.6V I 1.5Ah I Li-ion
Input Power	: 14 W
Ampere	: 3.8A
Container Capacity Working	: 250 ml
Tank Capacity Dirty Water	: 160 ml
Weight	: 1.5 kg

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 8.85 Kg/7.50 kg
Packaging Size	: 51 cm x 39.5 cm x 32.5 cm

- Clean Window Quick, easy and streak free
- No annoying water mess on floor or windows
- For all smooth surface, e.g. glass, mirror, shower and wall tiles
- Integrated spray function with detergent tank

INCLUDE : User Manual, Warranty Card, 2 Pcs Holder, 1 Pcs Microfiber, Handle

RYU
RYU

RYU
20V
Li-ion
4.0Ah

RCW20
CORDLESS IMPACT WRENCH 20V

INCLUDE : User Manual, Warranty Card, 2 Pcs Battery, Charger

SPECIFICATION

Voltage	: 20 Volt
Battery Curent	: 4 Ah
Drive	: 1/2" (13 mm)
No load Speed	: 0 - 2,400 rpm
Torque Max	: 320 Nm
Speed Setting	: 2 posisi
Battery	: Lithium-ion
Motor	: Brushless
Weight	: 3.5 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 19.5 Kg/18 kg
Packaging Size	: 64.5 cm x 36.5 cm x 34 cm

- High performance brushless motor
- Powerfull maximum torque of 320N.m
- 1 hour quick time battery charge
- Lithium-ion provides longer run time

RCG20
CORDLESS GRINDER 20V

INCLUDE : User Manual, Warranty Card, 2 Pcs Battery, Charger

SPECIFICATION

Voltage	: 20 Volt
Battery Curent	: 3 Ah
Disc Diameter	: 100 mm (4")
No load Speed	: 8500 rpm
Speed Setting	: 2 position
Battery	: Lithium-ion
Weight	: 3.5 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 19.5 Kg/18 kg
Packaging Size	: 64.5 cm x 36.5 cm x 34 cm

- High performance brushless motor
- Adjustable safety protect guard for disc
- 1 hour quick time battery charger
- Lithium-ion provides longer run time

ACCESSORIES

RYU
4 INCH
For Stainless Steel & Metal
Suitable to Any Brand Grinder
High Quality Materials
Sharper & Faster
RYU (AC) CUTTING WHEEL DOUBLE LAYER
TEMIROY CORPORATION
Japan Technology

AC-CW014

CUTTING WHEEL DOUBLE LAYER 105 MM X 1.2 MM X 16 MM (4")

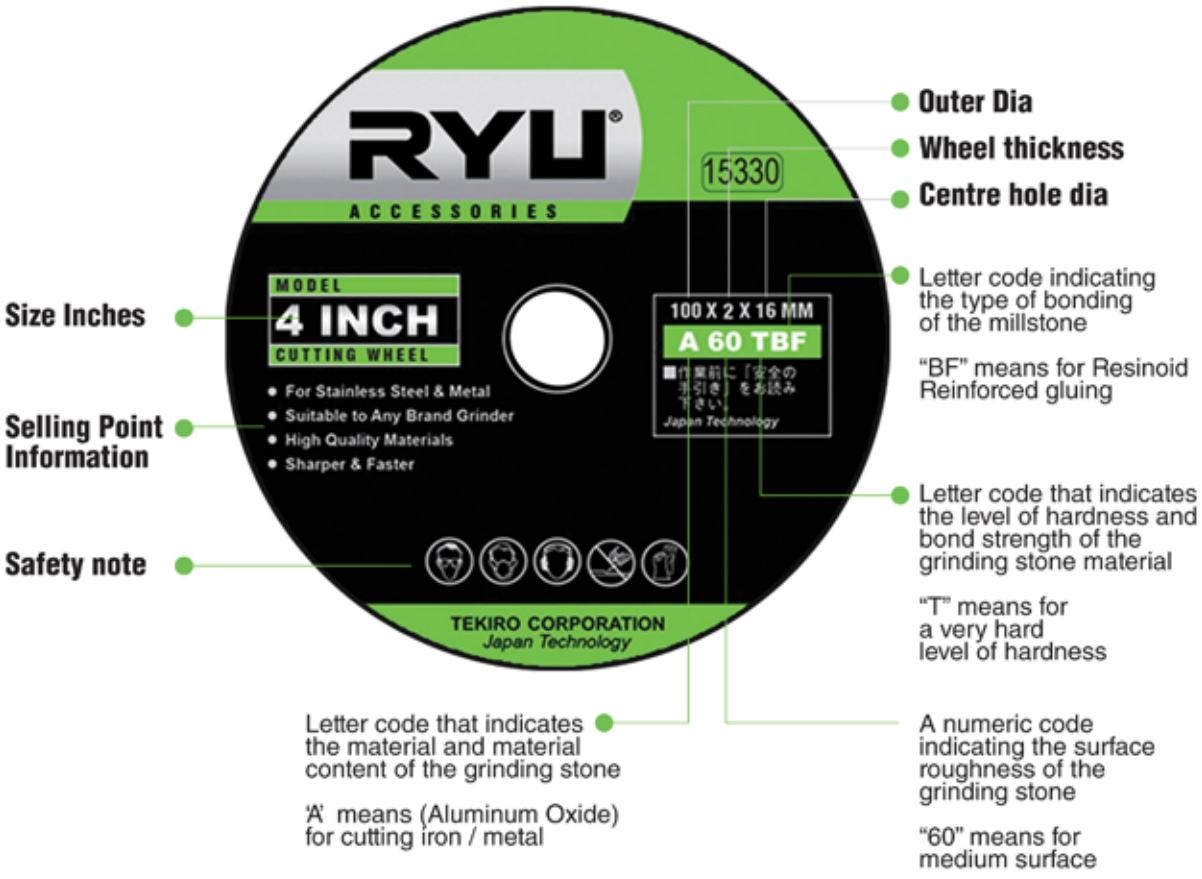

Selling Point Information

- For Stainless Steel & Metal
- Suitable to Any Brand Grinder
- High Quality Materials
- Sharper & Faster

SAFETY INSTRUCTION

TECHNICAL INFORMATION

CUTTING WHEEL DOUBLE LAYER 105 MM X 1.2 MM X 16 MM (4") is cutting wheel Versatile and irreplaceable quality, giving you the convenience of cutting iron and metal materials with medium surfaces plus a very hard hardness level increases work efficiency as well as a level of precision and has super long durability.

SPECIFICATION

Size : 100 x 1,2 x 16 mm (4")

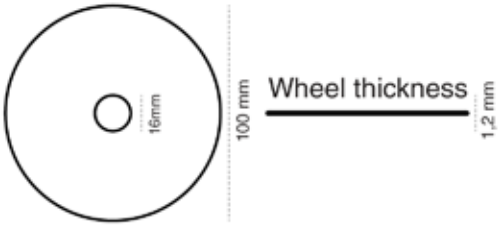

Packaging Information

Qty	: 20 pc/inner
Case Qty	: 600 pcs/ctn
G.W/N.W	: 16 Kg/15 kg
Packaging Size	: 36 cm x 23 cm x 26.5 cm

AC-CW017
CUTTING WHEEL 180 MM X 1,6 MM

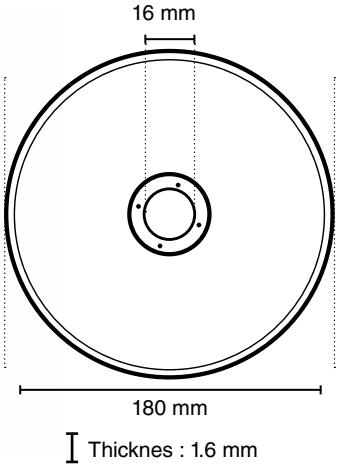

DESCRIPTION

Size : 180 x 1.6 mm
MAX.RPM : 15,300

Packaging Information
Qty : 8 pc/inner
Case Qty : 200 pcs/ctn
G.W/N.W : 20 Kg/19 kg
Packaging Size : 38 cm x 20 cm x 26.5 cm

- For stainless steel & metal
- Suitable to any brand grinder
- High quality material

AC-DD018
DIAMOND DISC DRY 110 X 10 X 1.8 MM (4")

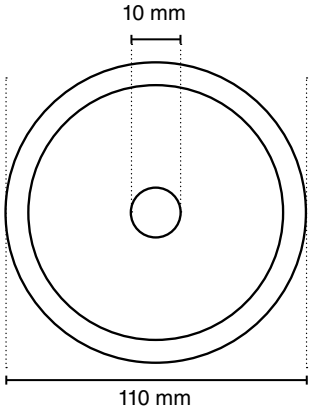

DESCRIPTION

Size : 110 X 10 X 1.8 mm
MAX.RPM : 15.300

Packaging Information
Qty : 12 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 15 Kg/14 kg
Packaging Size : 29 cm x 23 cm x 21 cm

- For use on tile, granite, marble, concrete & bricks
- Usable on angle grinders & marble cutters

AC-DD019
DIAMOND DISC WET 110 X 10 X 1.8 MM

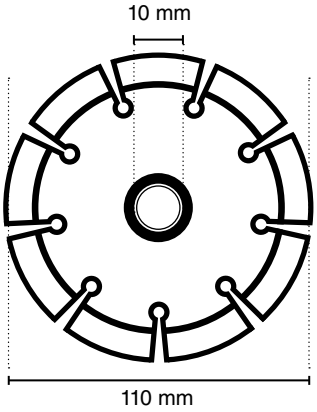

DESCRIPTION

Size : 110 X 10 X 1.8 mm
MAX.RPM : 15,300

Packaging Information
Qty : 12 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 15 Kg/14 kg
Packaging Size : 29 cm x 24 cm x 21 cm

- For use on tile, granite, marble, concrete & bricks
- Usable on angle grinders & marble cutters

AC-DD180

DIAMOND WHEEL TURBO 110 X 10 X 1.2 MM (4”)

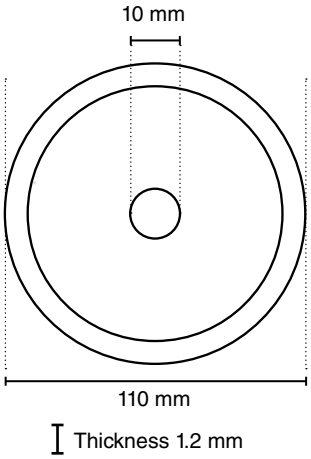

DESCRIPTION

Size	: 110 X 10 X 1.2 mm (4”)
MAX.RPM	: 15.300

Packaging Information

Qty	: 10 pcs/inner
Case Qty	: 200 pcs/ctn
G.W/N.W	: 19.3 Kg/18.3 kg
Packaging Size	: 40.5 cm x 31 cm x 21 cm

- For Use ON Tile, Granits, Marble, Concrete & Brica
- Usable On Angle Grinder & Marble Cutters
- Sharper & Faster

CUP BRUSH TWIST

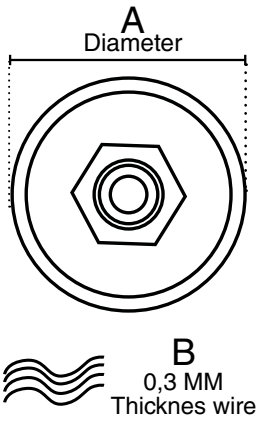

- for used to bind and clean heavy impurities such as rust, iron scale, oysters
- usable on angle grinders
- More Stronger

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-CB013	75 (3”)	0,3	12,500
AC-CB012	100 (4”)	0,3	8,500

Packaging Information (AC-CB013)

Qty	: 10 pcs/inner
Case Qty	: 60 pcs/ctn
G.W/N.W	: 19.96 Kg/18 kg
Packaging Size	: 60 cm x 39 cm x 26 cm

Packaging Information (AC-CB012)

Qty	: 4 pcs/inner
Case Qty	: 24 pcs/ctn
G.W/N.W	: 14 Kg/13 kg
Packaging Size	: 66 cm x 25 cm x 32 cm

AC-GW154

GRINDING WHEEL DOUBLE LAYER 100 MM X 6 MM X16 MM (4”)

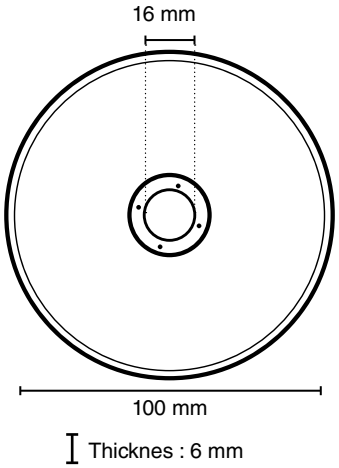

DESCRIPTION

Size	: 100 X 6 X 16 mm (4”)
MAX.RPM	: 15.300

Packaging Information

Qty	: 25 pcs/inner
Case Qty	: 200 pcs/ctn
G.W/N.W	: 21 Kg/20 kg
Packaging Size	: 45 cm x 23 cm x 20 cm

- For Stainless Steel & Metal
- Suitable to Any Brand Grinder
- High Quality Materials

CUP BRUSH CRIMPED

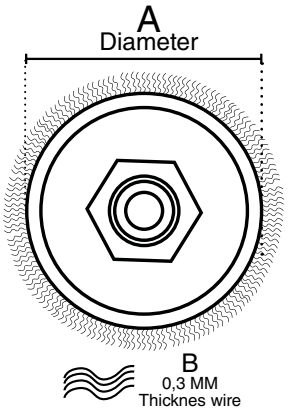

- For used to bind and clean heavy impurities such as rust, iron scale, oysters
- Usable on angle grinders
- More Stronger

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-CB011	75 (3”)	0,3	12,500
AC-CB010	100 (4”)	0,3	8,500

Packaging Information (AC-CB011)
Qty : 10 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 18 Kg/17 kg
Packaging Size : 61 cm x 39.5 cm x 26.8 cm

Packaging Information (AC-CB011)
Qty : 4 pcs/inner
Case Qty : 24 pcs/ctn
G.W/N.W : 12 Kg/11 kg
Packaging Size : 66 cm x 26 cm x 32 cm

TWIST KNOT TWISTED

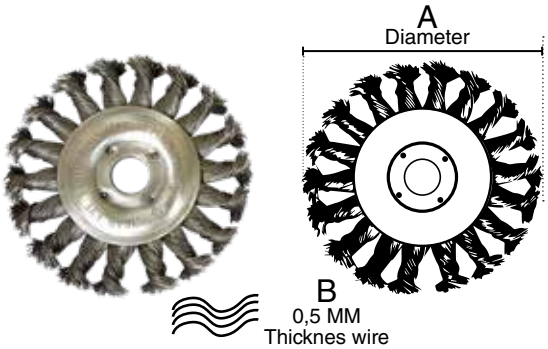

Packaging Information (AC-TK135)
Qty : 1 pc/inner
Case Qty : 30 pcs/ctn
G.W/N.W : 16 Kg/14 kg
Packaging Size : 51 cm x 32.5 cm x 19 cm

Packaging Information (AC-TK136)
Qty : 1 pc/inner
Case Qty : 20 pcs/ctn
G.W/N.W : 20 Kg/19 kg
Packaging Size : 43 cm x 22 cm x 38 cm

- Suitable for any brand grinder
- High quality Materials
- Easy to use

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-TK133	100 (4”)	0.5	6,000
AC-TK134	125 (5”)	0.5	6,000
AC-TK135	150 (6”)	0.5	6,000
AC-TK136	200 (8”)	0.5	6,000

Packaging Information (AC-TK133)
Qty : 1 pc/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 13 Kg/12 kg
Packaging Size : 34 cm x 23 cm x 33 cm

Packaging Information (AC-TK134)
Qty : 1 pc/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 14 Kg/13 kg
Packaging Size : 41 cm x 27 cm x 25 cm

CIRCULAR BRUSH CRIMPED

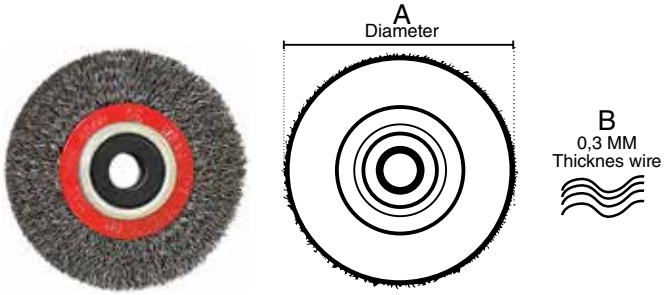

Packaging Information (AC-CL004)
Qty : 1 pcs/inner
Case Qty : 30 pcs/ctn
G.W/N.W : 18 Kg/16 kg
Packaging Size : 51 cm x 18.5 cm x 36 cm

Packaging Information (AC-CL005)
Qty : 1 pcs/inner
Case Qty : 20 pcs/ctn
G.W/N.W : 18 Kg/16 kg
Packaging Size : 43 cm x 21 cm x 38 cm

- Suitable for any brand grinder
- High quality Materials
- Easy to use

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-CL002	100 (4”)	0.3	6,000
AC-CL003	125 (5”)	0.3	6,000
AC-CL004	150 (6”)	0.3	6,000
AC-CL005	200 (8”)	0.3	6,000

Packaging Information (AC-CL002)
Qty : 1 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 15.5 Kg/13.05 kg
Packaging Size : 34 cm x 22 cm x 32 cm

Packaging Information (AC-CL003)
Qty : 1 pcs/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 14.05 Kg/12.05 kg
Packaging Size : 41 cm x 26 cm x 25 cm

TWIST KNOT CRIMPED



DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-TK129	100 (4”)	0.3	6,000
AC-TK130	125 (5”)	0.3	6,000
AC-TK131	150 (6”)	0.3	6,000
AC-TK132	200 (8”)	0.3	6,000

Packaging Information (AC-TK131)
Qty : 1 pc/inner
Case Qty : 30 pcs/ctn
G.W/N.W : 11 Kg/9 kg
Packaging Size : 50 cm x 32.5 cm x 19 cm

Packaging Information (AC-TK132)
Qty : 1 pc/inner
Case Qty : 20 pcs/ctn
G.W/N.W : 14 Kg/12 kg
Packaging Size : 43 cm x 21 cm x 39 cm

- Suitable for any brand grinder
- High quality Materials
- Easy to use

Packaging Information (AC-TK129)
Qty : 1 pc/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 8 Kg/7 kg
Packaging Size : 34 cm x 22 cm x 32 cm

Packaging Information (AC-TK130)
Qty : 1 pc/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 15 Kg/6 kg
Packaging Size : 41 cm x 26.5 cm x 23 cm

CIRCULAR SAW BLADE 24 & 40 TEETH

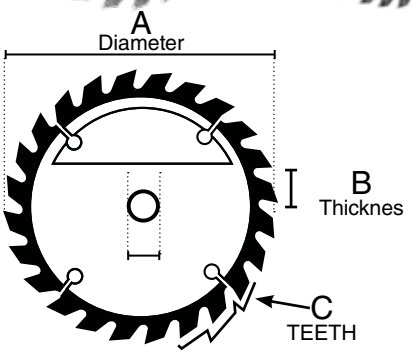

- For Cutting wood
- Suitable for 4” Circular
- High Quality Material
- Sharper & faster

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (TEETH)	MAX RPM
AC-BD151	180	1,6	24	7,500
AC-BD137	180	1,6	40	7,500
AC-BD142	100	1,6	40	7,500

Packaging Information (AC-BD137)
Qty : 5 pcs/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 14 Kg/14 kg
Packaging Size : 27 cm x 25 cm x 31 cm

Packaging Information (AC-BD151)
Qty : 10 pcs/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 14 Kg/13 kg
Packaging Size : 49.5 cm x 26 cm x 16 cm

Packaging Information (AC-BD142)
Qty : 4 pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : 8.5 Kg/8 kg
Packaging Size : 27 cm x 19.8 cm x 15 cm

AC-BD145
MULTI CUTTER 4” X 40 T

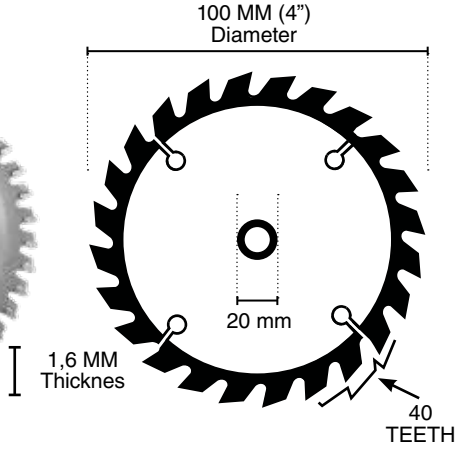

DESCRIPTION

Size : 100 mm (4”) X 40 TEETH
MAX.RPM : 7,500

Packaging Information
Qty : 25 pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : 9 Kg/8 kg
Packaging Size : 27 cm x 22 cm x 16 cm

- For Cutting wood, plastic, aluminium
- Suitable for 4” Grinder
- High Quality Material
- Sharper & faster

AC-DB107
SDS PLUS

Selling Point Information

- SDS plus-1 Drill Bit is optimized for drilling in concrete
- 2-cutter Tungsten Carbide plate makes the bit extra tough
- 2-flute U-shape flute design provides effective dust removal and standard lifetimes
- Compatible all rotary hammer with SDS plus holder

TECHNICAL INFORMATION

RYU (AC) RYU SDS PLUS AC-DB107 is optimized for drilling concrete. Its 2-cutter Tungsten Carbide plate makes the bit extra tough while its 2-flute U-shape flute design provides effective dust removal and standard lifetime. The bit is intended for use on masonry and concrete. It is compatible with all rotary hammers with SDS plus holder.

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-DB107	5.0	50	110
AC-DB108	5.5	50	110
AC-DB109	6.0	50	110
AC-DB110	6.0	100	160
AC-DB111	6.5	100	160
AC-DB112	7.0	100	160
AC-DB113	8.0	50	110
AC-DB114	8.0	100	160
AC-DB115	9.0	150	210
AC-DB116	10.0	100	160
AC-DB117	10.0	150	210
AC-DB118	10.0	200	260
AC-DB119	10.0	240	300
AC-DB120	12.0	100	160
AC-DB121	14.0	150	210
AC-DB122	16.0	150	210
AC-DB123	16.0	240	300
AC-DB124	16.0	400	460
AC-DB125	18.0	240	300
AC-DB126	20.0	240	300
AC-DB127	22.0	200	260
AC-DB128	24.0	200	260

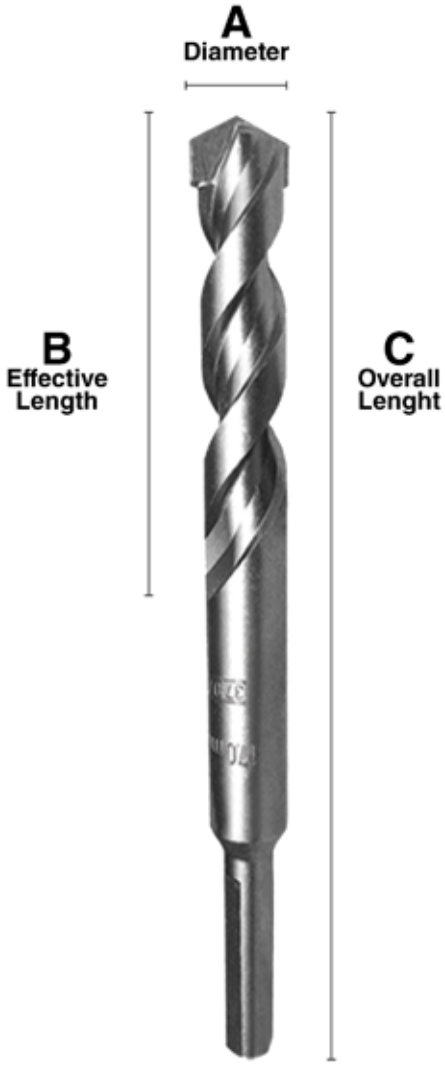

Normal Centering tip for optimal hole geometry and provides rounder holes

perfectly tilted thread for easier sewage removal

SDS Plus is compatible with all rotary hammer drill brands

HSS PRO DRILL BITS

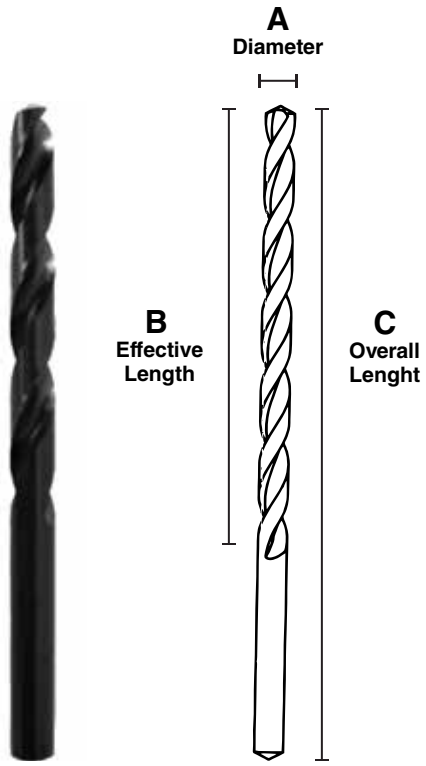

- 5X More Sharper
- 5X More Stronger
- Standard DIN 338
- 135 Point Sharper

Item Code	A (mm)	B (mm)	C (mm)
AC-DB050	1.0	12	34
AC-DB051	1.5	18	40
AC-DB052	2.0	24	49
AC-DB053	2.5	30	57
AC-DB054	3.0	33	61
AC-DB055	3.5	39	70
AC-DB056	4.0	43	75
AC-DB057	4.5	47	80
AC-DB058	5.0	52	86
AC-DB059	5.5	57	93
AC-DB060	6.0	57	93
AC-DB061	6.5	63	101
AC-DB062	7.0	69	109
AC-DB063	7.5	69	109
AC-DB064	8.0	75	117
AC-DB065	8.5	75	117
AC-DB066	9.0	81	125
AC-DB067	9.5	81	125
AC-DB068	10.0	87	133
AC-DB069	10.5	87	133
AC-DB070	11.0	94	142
AC-DB071	11.5	94	142
AC-DB072	12.0	101	151
AC-DB073	12.5	101	151
AC-DB074	13.0	101	151

HSS COBALT DRILL BITS

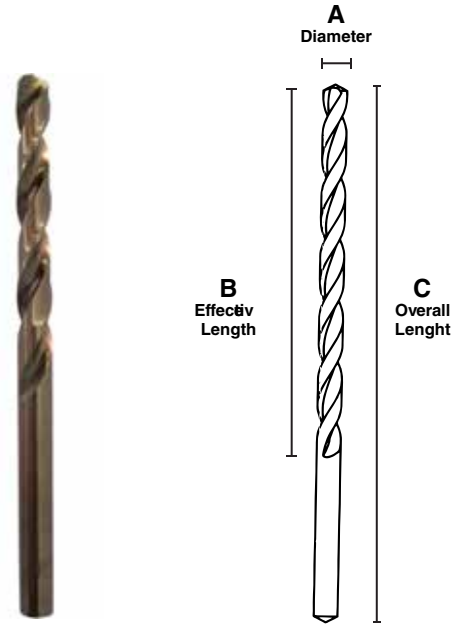

- 5X More Sharper
- 5X More Stronger
- Standard DIN 338
- 135 Point Sharper

Item Code	A (mm)	B (mm)	C (mm)
AC-DB028	2.0	24	49
AC-DB029	2.5	30	57
AC-DB030	3.0	33	61
AC-DB031	3.5	39	70
AC-DB032	4.0	43	75
AC-DB033	4.5	47	80
AC-DB034	5.0	52	86
AC-DB035	5.5	57	93
AC-DB036	6.0	57	93
AC-DB037	6.5	63	101
AC-DB038	7.0	69	109
AC-DB039	7.5	69	109
AC-DB040	8.0	75	117
AC-DB041	8.5	75	117
AC-DB042	9.0	81	125
AC-DB043	9.5	81	125
AC-DB044	10.0	87	133
AC-DB045	11.0	94	142
AC-DB046	12.0	101	151
AC-DB047	13.0	101	151

MASONRY

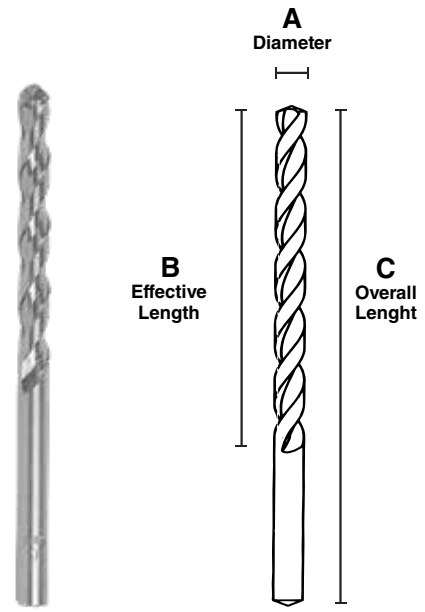

- 5X More Sharper
- 5X More Stronger
- Standard DIN 338
- 135 Point Sharper

Item Code	A (mm)	B (mm)	C (mm)
AC-DB077	3.0	40	70
AC-DB078	3.5	45	75
AC-DB079	4.0	40	70
AC-DB081	5.0	50	80
AC-DB083	5.5	50	80
AC-DB085	6.0	60	100
AC-DB086	6.5	60	100
AC-DB088	7.0	60	110
AC-DB090	8.0	80	125
AC-DB091	10.0	80	125
AC-DB092	10.0	80	140
AC-DB093	12.0	90	140
AC-DB094	12.0	90	160
AC-DB096	14.0	90	200
AC-DB098	16.0	90	200
AC-DB100	17.0	90	200
AC-DB102	19.0	100	200
AC-DB104	22.0	100	200
AC-DB105	25.0	210	300

SDS PLUS FLAT CHISEL 22 X 14 X 280 MM

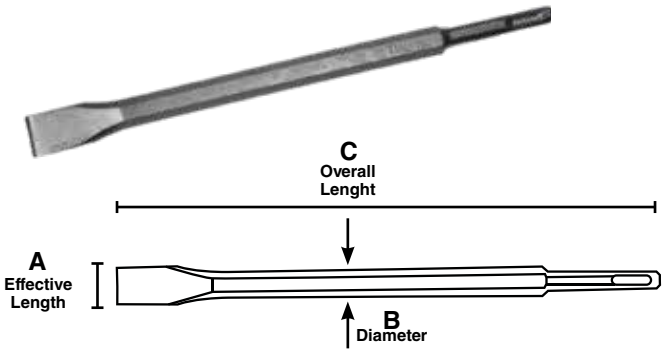

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-CH026	22.0	14.0	280

Packaging Information

Qty : 1 pc/inner
Case Qty : 50 pcs/ctn
G.W/N.W : 15 Kg/14 kg
Packaging Size : 32 cm x 20 cm x 16 cm

- 5X More Stronger
- Suitable for any brand Rotary Hammer
- High Quality Materials
- Easy to Use SDS Plus

HEXAGON FLAT CHISEL

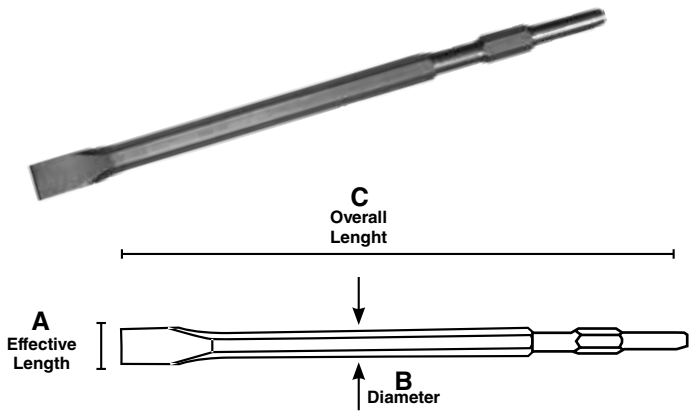

- 5X More Stronger
- Suitable for any brand Demolition Hammer
- High Quality Materials
- Easy to Use Hexagon Shank

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-CH020	25.0	17	280
AC-CH021	25.0	17	400
AC-CH022	35.0	30	450

Packaging Information (AC-CH020)

Qty : 1 pc/inner
Case Qty : 50 pcs/ctn
G.W/N.W : 22 Kg/21 kg
Packaging Size : 32 cm x 24 cm x 13 cm

Packaging Information (AC-CH022)

Qty : 1 pc/inner
Case Qty : 10 pcs/ctn
G.W/N.W : 17.5 Kg/16.5 kg
Packaging Size : 49 cm x 19 cm x 8 cm

Packaging Information (AC-CH021)

Qty : 1 pc/inner
Case Qty : 25 pcs/ctn
G.W/N.W : 17 Kg/16 kg
Packaging Size : 43 cm x 15 cm x 11 cm

SDS PLUS POINTED CHISEL 14 X 280 MM

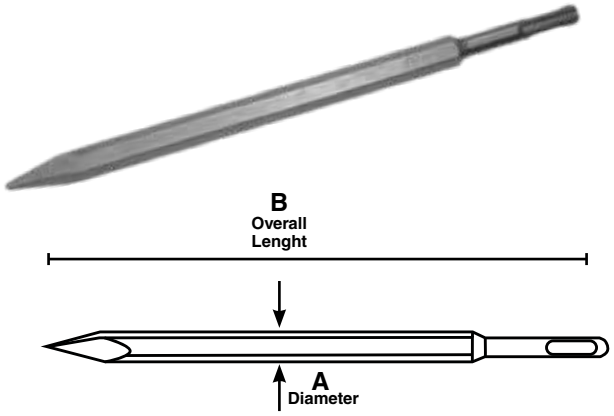

DESCRIPTION

ITEM CODE	A (MM)	B (MM)
AC-CH027	14.0	280

Packaging Information

Qty	: 1 pc/inner
Case Qty	: 50 pcs/ctn
G.W/N.W	: 14 Kg/15 kg
Packaging Size	: 32 cm x 20 cm x 16 cm

- 5X More Stronger
- Suitable for any brand Rotary Hammer
- High Quality Materials
- Easy to Use SDS Plus

HEXAGON POINTED CHISEL

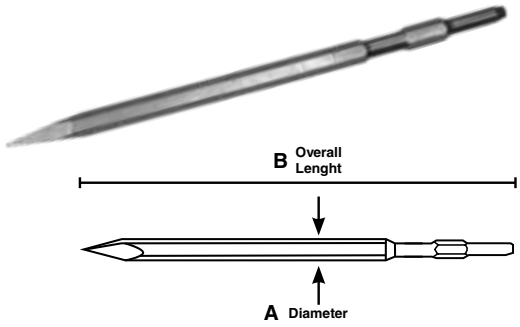

DESCRIPTION

ITEM CODE	A (MM)	B (MM)
AC-CH023	17	280
AC-CH024	17	400
AC-CH025	30	450

Packaging Information (AC-CH025)

Qty	: 1 pc/inner
Case Qty	: 10 pcs/ctn
G.W/N.W	: 17 Kg/16 kg
Packaging Size	: 49 cm x 15.5 cm x 12 cm

- 5X More Stronger
- Suitable for any brand Demolition Hammer
- High Quality Materials
- Easy to Use Hexagon Shank

Packaging Information (AC-CH023)

Qty	: 1 pc/inner
Case Qty	: 50 pcs/ctn
G.W/N.W	: 21.5 Kg/20.5 kg
Packaging Size	: 32 cm x 20 cm x 16 cm

Packaging Information (AC-CH024)

Qty	: 1 pc/inner
Case Qty	: 25 pcs/ctn
G.W/N.W	: 16.5 Kg/15.5 kg
Packaging Size	: 43 cm x 16 cm x 10 cm

HSS PRO SET

HSS PRO SET (1-10MM) QTY = 19 PCS
1mm,1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm

HSS PRO SET (1-13MM) QTY = 25 PCS
1mm,1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm, 10.5mm, 11mm, 11.5mm, 12mm, 12.5mm, 13mm

DESCRIPTION

ITEM CODE	SIZE
AC-DB075	1 - 10 mm
AC-DB076	1 - 13 mm

Packaging Information (AC-DB075)

Qty	: 5 pcs/inner
Case Qty	: 20 pcs/ctn
G.W/N.W	: 6.6 Kg/6 kg
Packaging Size	: 26 cm x 25 cm x 18 cm

Packaging Information (AC-DB076)

Qty	: 1 pcs/inner
Case Qty	: 10 pcs/ctn
G.W/N.W	: 13.5 Kg/12.07 kg
Packaging Size	: 31 cm x 25 cm x 22 cm

- 5X More Sharper
- 5X More Stronger
- DIN 338 Standart
- 135° Point Sharper

AC-DB155

DRILL SET 41 PCS BMC

DESCRIPTION

- 11pcs HSS 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5 mm
- 4pcs MASONRY 4, 5, 6, 8 mm
- 4pcs WOOD 4, 5, 6, 8 mm
- 3pcs SLOTTED 4, 6, 7 mm
- 5pcs Torx T15, T20, T25, T30, T40
- 4pcs PHILLIPS #1, #2, #2, #3
- 4pcs POZI DRIVER #!, #2, #2, #3
- 4pcs HEX 3, 4, 5, 6 mm
- 1pc Counter sink

Packaging Information

Qty	: 1 pc/inner
Case Qty	: 10 pcs/ctn
G.W/N.W	: 6 Kg/5.6 kg
Packaging Size	: 32.5 cm x 18.5 cm x 24.5 cm

- Easy for use
- Comfortable for carry
- Compact design

HSS COBALT SET

DESCRIPTION

ITEM CODE	SIZE
AC-DB048	1 - 10 mm
AC-DB049	1 - 13 mm

- 5X More Sharper
- 5X More Stronger
- DIN 338 Standart
- 135° Point Sharper

HSS COBALT SET (1-10MM) QTY = 19 PCS

1mm,1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm

Packaging Information (AC-DB048)

Qty	: 1 pc/inner
Case Qty	: 20 pcs/ctn
G.W/N.W	: 6.6 Kg/6 kg
Packaging Size	: 26 cm x 24 cm x 18 cm

HSS COBALT SET (1-13MM) QTY = 25 PCS

1mm,1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm, 10.5mm, 11mm, 11.5mm, 12mm, 12.5mm, 13mm

Packaging Information (AC-DB049)

Qty	: 1 pc/inner
Case Qty	: 10 pcs/ctn
G.W/N.W	: 13.5 Kg/12.7 kg
Packaging Size	: 32 cm x 26 cm x 22 cm

RYU
PLANNER BLADE
82 MM X 18 MM

AC-BD144
PLANNER BLADE
SKH 82 MM X 10 MM

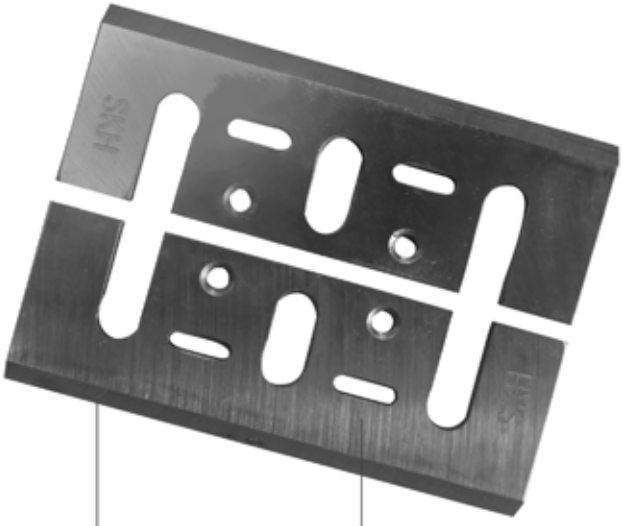

Selling Point Information

- Heavy Duty Cutting
- Solid High Speed Steel
- Re-sharpenable

SAFETY INSTRUCTION

TECHNICAL INFORMATION

RYU (AC) PLANNER BLADE Drawstring blades can be used in RYU (UN) Planner and almost all brands of drawstring machines commonly used in Indonesia. Made of SKH material which is a very hard and heat resistant metal. These shaved blades can be sharpened using a special diamond grinding.

SPECIFICATION

Material	: Metal (KSH)
Product Dimension	: 82 mm x 29 mm x 3 mm
Weight	: 0.1 kg

Packaging Information

Qty	: 20 pcs/inner
Case Qty	: 200 pcs/ctn
G.W/N.W	: 11.5 Kg/11.3 kg
Packaging Size	: 57 cm x 26 cm x 18.5 cm

AC-BD143
PLANNER BLADE TCT 82 MM X 7 MM



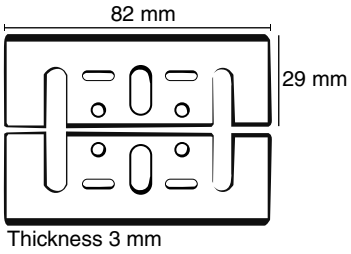

DESCRIPTION

Material : TCT
Dimension : 82 mm x 29 mm x 3 mm
Weight : 0,1 Kg

Packaging Information
Qty : 20 pcs/inner
Case Qty : 200 pcs/ctn
G.W/N.W : 11,5 Kg/11,3 kg
Packaging Size : 57 cm x 26 cm x 18,5 cm

- Heavy Duty Cutting
- Solid High Speed Steel
- Re-sharpenable

AC-BD152
SEGMENT HSS SAW 3-1/8”



DESCRIPTION

Material : HSS, M2
Dimension : Ø82
Model : HSS Saw
Color : Black

Packaging Information
Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 6.5 Kg/6.3 kg
Packaging Size : 58 cm x 35 cm x 18 cm

- For Wood, Plastic, and Metal
- Solid High Stainless Steel
- Re-sharpenable

AC-TE149
TRIANGULAR EVA SENDING PAD 3-1/8”

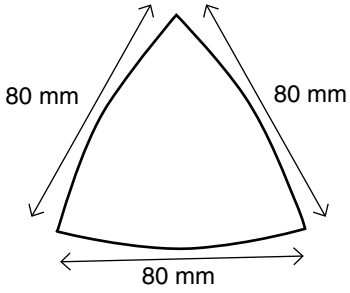

DESCRIPTION

Material : 2Cr13
Dimension : 80 x 80 x 80 mm
Model : Sending Pad
Color : Black

Packaging Information
Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 7.5 Kg/7.2 kg
Packaging Size : 66 cm x 35 cm x 18 cm

- Paste Sand Paper
- Soft Material
- Re-sharpenable

AC-BD140
BRAZED CARBIDE TRIANGULAR BLADE 3”

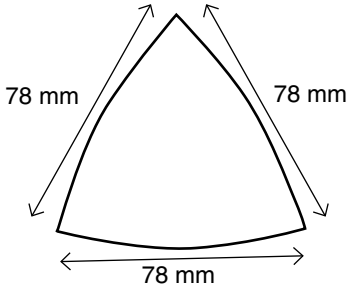

DESCRIPTION

Material : YGB Carbide Grit (30-40 MESH)
Dimension : 78 X 78 X 78 mm
Model : Triangular Blade
Color : Golden

Packaging Information
Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 9 Kg/8.8 kg
Packaging Size : 58 cm x 35 cm x 18 cm

- For Grind Tiles and Marble Cutting
- Carbide Grit : 60-80 mesh Material
- Re-sharpenable

AC-BD141

HALF MOON BRAZED CARBIDE BLADE 2-1/2”



DESCRIPTION

Material	: Carbide Grit (60 - 80 MESH)
Dimension	: Ø63.5
Model	: Half-Moon Blade
Color	: Golden

Packaging Information

Qty	: 20 pcs/inner
Case Qty	: 120 pcs/ctn
G.W/N.W	: 7.7 Kg/7.4 kg
Packaging Size	: 58 cm x 35 cm x 18 cm

- For Grind Tiles and Marble Cutting
- Carbide Grit : 60-80 mesh Material
- Re-sharpenable

AC-BD138

CURVED SCRAPER BLADE 2”



DESCRIPTION

Material	: SS301
Dimension	: 52 x 74,5 mm
Model	: 2” Scraper Blade
Color	: Natural Color

Packaging Information

Qty	: 20 pcs/inner
Case Qty	: 120 pcs/ctn
G.W/N.W	: 6.8 Kg/6.5 kg
Packaging Size	: 66 cm x 35 cm x 18 cm

- For Removing Floor, Wall, Ciment
- Solid High Stainless Steel
- Re-sharpenable

AC-SP148

TRIANGLE SAND PAPER

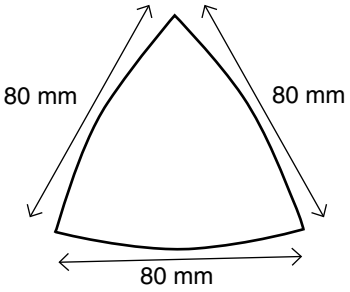

DESCRIPTION

Material	: Grift 60/80/120/each 2 pcs
Dimension	: 80 x 80 x 80 mm
Model	: Sand Paper
Color	: Natural Color

Packaging Information

Qty	: 20 pcs/inner
Case Qty	: 120 pcs/ctn
G.W/N.W	: 7.5 Kg/7.2 kg
Packaging Size	: 66 cm x 35 cm x 18 cm

- Fast and easy for removal and replacement
- Open coat makes an even and consistent scratc pattern
- High strength resin bond system
- High quality material

AC-BD139

HCS SAW BLADE STRAIGHT TOOTH 1-1/4”

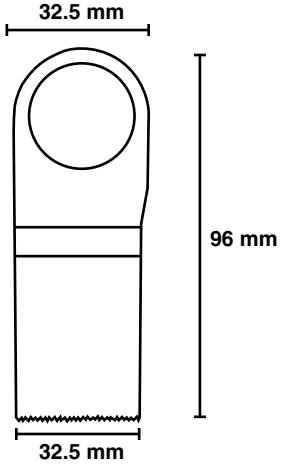

DESCRIPTION

Material	: Blade SKS Holder 65Mn
Dimension	: 32.5 x 32.5 x 96 mm
Model	: Straight Tooth
Color	: Black

Packaging Information

Qty	: 20 pcs/inner
Case Qty	: 120 pcs/ctn
G.W/N.W	: 5.5 Kg/5.3 kg
Packaging Size	: 50 cm x 32.5 cm x 18 cm

- Heavy Duty Cutting
- Suitable for any brand Multi Oscilating Cutter Grinder
- Solid High Speed Steel
- Re-sharpenable
- Plug and Play

AC-BD153

BI-METAL STRAIGHT SAW BLADE OBLIQUE TOOTH 1-3/8”

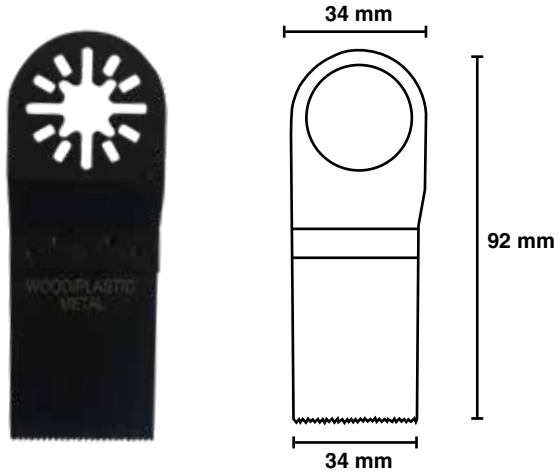

DESCRIPTION

Material	: Blade M42 Holder 65Mn
Dimension	: 34 x 34 x 92 mm
Model	: Oblique Tooth
Color	: Black

Packaging Information

Qty	: 20 pcs/inner
Case Qty	: 120 pcs/ctn
G.W/N.W	: 6 Kg/5.8 kg
Packaging Size	: 50 cm x 29.5 cm x 18 cm

- Heavy Duty Cutting
- Suitable for any brand Multi Oscilating Cutter Grinder
- Solid High Speed Steel
- Re-sharpenable
- Plug and Play

AC-DB178

FLAT WOOD DRIL BIT SET 6 PCS

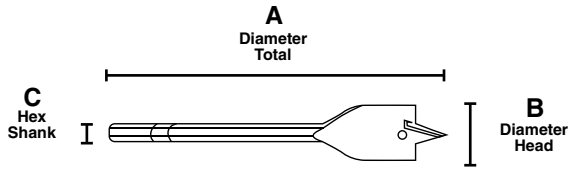

DESCRIPTION

A (MM)	B (MM)	C (MM)
152	10	1/4”
152	13	1/4”
152	16	1/4”
152	19	1/4”
152	22	1/4”
152	25	1/4”

Packaging Information

Qty	: 6 pcs/inner
Case Qty	: 60 pcs/ctn
G.W/N.W	: 17.5 Kg/16.5 kg
Packaging Size	: 38 cm x 24 cm x 33 cm

- Universal hexagon Shank
- High Quality Material
- Suitable for any Brand Drill 3 jaw Chuck

DIAMOND HOLE SAW

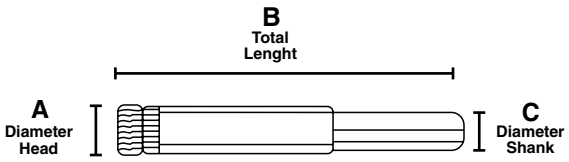

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-HS167	4.0	55	3
AC-HS168	5.0	55	4
AC-HS169	6.0	55	5
AC-HS170	8.0	55	6
AC-HS171	10.0	55	6
AC-HS172	12.0	55	6
AC-HS173	14.0	55	6
AC-HS174	16.0	55	6

- Universal Around Shank
- High Quality Material
- Suitable for any Brand Drill 3 jaw Chuck

BAND SAW BLADE

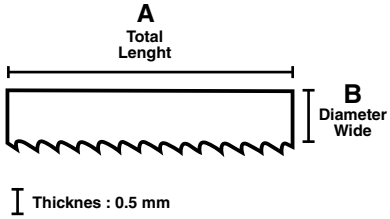

- Lengths to fit the most common band saw sizes.
- High Carbon Steel Material
- For Quick Perfect Cutting
- Resists heat build up for smoother operation and longer

DESCRIPTION

ITEM CODE	A (MM)	B (MM)
AC-BS175	1430	10
AC-BS176	1430	6.3
AC-BS177	1848	10

Packaging Information (AC-BS175)
Qty : 1 pcs/inner
Case Qty : 250 pcs/ctn
G.W/N.W : 12 Kg/11 kg
Packaging Size : 72 cm x 37 cm x 36 cm

Packaging Information (AC-BS176)
Qty : 1 pcs/inner
Case Qty : 250 pcs/ctn
G.W/N.W : 9.5 Kg/8.5 kg
Packaging Size : 72 cm x 37 cm x 36 cm

Packaging Information (AC-BS177)
Qty : 1 pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : 8 Kg/7 kg
Packaging Size : 72 cm x 37 cm x 36 cm

FORSTNER BIT

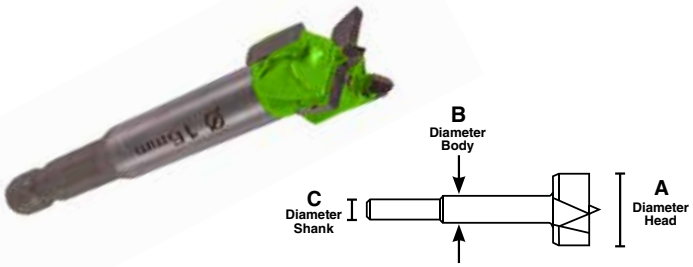

Packaging Information (AC-DB161)
Qty : 12 pcs/inner
Case Qty : 240 pcs/ctn
G.W/N.W : 25.5 Kg/24.5 kg
Packaging Size : 41 cm x 37 cm x 36 cm

Packaging Information (AC-DB162)
Qty : 12 pcs/inner
Case Qty : 240 pcs/ctn
G.W/N.W : 27.5 Kg/26.5 kg
Packaging Size : 41 cm x 37 cm x 36 cm

- Suitable For Standard 3-Jaw Chuck
- with wooden case for easy storage
- Universal Around Shank

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-DB158	16.0	9	7
AC-DB159	18.0	9	7
AC-DB160	22.0	9	7
AC-DB161	30.0	12	9.8
AC-DB162	35.0	12	9.8

Packaging Information (AC-DB158)
Qty : 25 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 18 Kg/17 kg
Packaging Size : 41 cm x 37 cm x 36 cm

Packaging Information (AC-DB159)
Qty : 25 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 19 Kg/18 kg
Packaging Size : 41 cm x 37 cm x 36 cm

Packaging Information (AC-DB160)
Qty : 25 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 20 Kg/19 kg
Packaging Size : 41 cm x 37 cm x 36 cm

AC-DB157
ROUTER BITS 1/4" SET 12 PCS

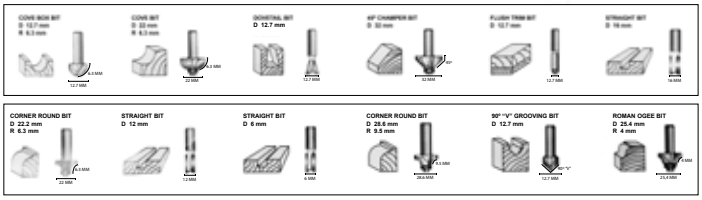

DESCRIPTION

- Multi-AXIS Grinding Creates A 3X Longer Lasting Miror Finish
- Tri- Metal Blazing
- Anti KickBack Design
- Sinterhip Hi-Density Industrial Chrome
- Round Shank

Packaging Information
Qty : 1 pcs/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 21 Kg/20 kg
Packaging Size : 53 cm x 36 cm x 31 cm

DRILL CHUCK

10 - 13 MM
(3/8)

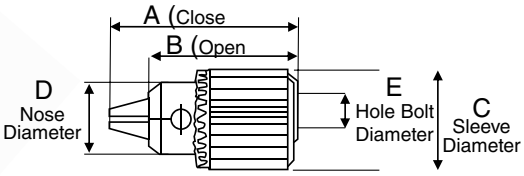

- High Speed Steel Material
- Heavy Duty And Stronger
- Design For More Comfortable

13 - 16 MM
(1/2)

DESCRIPTION

SPESIFICATION	A	B	C	D	E
AC-CK163 3/8" X 10 mm	60.4	50	33.1	25	9.3
AC-CK164 3/8" X 13 mm	70.5	57	41	19.2	9.6
AC-CK165 1/2" X 13 mm	70.6	57	42.0	30.7	11.45
AC-CK166 1/2" X 16 mm	86.0	69	50.5	37.7	11.45

Packaging Information (AC-CK165)
Qty : 12 pcs/inner
Case Qty : 48 pcs/ctn
G.W/N.W : 17.4 Kg/16.9 kg
Packaging Size : 48 cm x 30.5 cm x 23.5 cm

Packaging Information (AC-CK166)
Qty : 8 pcs/inner
Case Qty : 32 pcs/ctn
G.W/N.W : 20.5 Kg/20 kg
Packaging Size : 48 cm x 27.5 cm x 23.5 cm

Packaging Information (AC-CK163)
Qty : 12 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 12.6 Kg/12.1 kg
Packaging Size : 59.5 cm x 27 cm x 19.5 cm

Packaging Information (AC-CK164)
Qty : 12 pcs/inner
Case Qty : 48 pcs/ctn
G.W/N.W : 16.6 Kg/16.1 kg
Packaging Size : 48 cm x 30.5 cm x 23.5 cm

AC-CB147
CABLE CONNECTOR (MALE)

- More Stronger
- Suitable for any brand INVERTER
- High Quality Materials,
- Plug and play to use

DESCRIPTION

Welding Cable Size : 10 - 25 mm
Max. Current : 200 A
Material : Copper

Packaging Information
Qty : 20 pcs/inner
Case Qty : 500 pcs/ctn
G.W/N.W : 22 Kg/21.5 kg
Packaging Size : 52 cm x 27.5 cm x 28.5 cm

AC-CB146
CABLE CONNECTOR FEMALE (10-25)

- More Stronger
- Suitable for any brand INVERTER
- High Quality Materials,
- Plug and play to use

DESCRIPTION

Welding Cable Size : 10 - 25 mm
Max. Current : 200 A
Material : Copper

Packaging Information
Qty : 20 pcs/inner
Case Qty : 500 pcs/ctn
G.W/N.W : 22.1 Kg/22 kg
Packaging Size : 41 cm x 32 cm x 22.5 cm

AC-BK150
CHAIN SAW BRACKET

- Heavy Duty Cutting
- High Quality Materials
- Plug and Play to use

DESCRIPTION

Guide Bar Materials : Spring Steel
Chain Materials : High Carbon Steel
Connecting Rod Size : M10/M14
Guide Bar Size : 34x6 cm
Total Teeth : 22
Chain Length : 82 cm
Chain Thickness : 4.7 mm
Wood Cutter Diameter : 28 cm
Total Length of Bracket : 39 cm
Handle Height : 18 cm

Packaging Information
Qty : 1 pc/inner
Case Qty : 16 pcs/ctn
G.W/N.W : 23.5 Kg/21.5 kg
Packaging Size : 58 cm x 37 cm x 28 cm

ENGINE

ON
OFF

RCP150
COMPRESSOR
30 LITER 1.5 HP

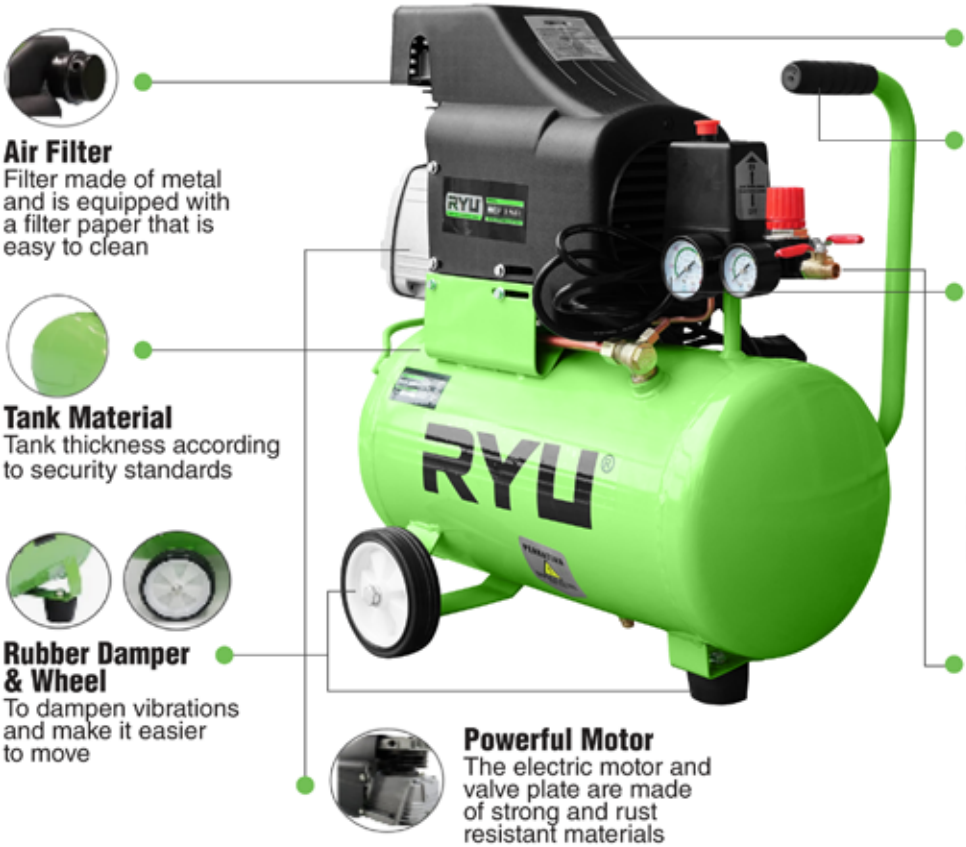

Air Filter
Filter made of metal and is equipped with a filter paper that is easy to clean

Tank Material
Tank thickness according to security standards

Rubber Damper & Wheel
To dampen vibrations and make it easier to move

Powerful Motor
The electric motor and valve plate are made of strong and rust resistant materials

Cover Motor
Protect from water and more safety

Handel
For easy handling

Pressure Valve & Pressure Gauge
Equipped with a pressure valve that functions on / off the engine automatically and an indicator of air pressure

Ball Valve
Make it easy to open close at the time of use

Selling Point Information

- The electric motor and valve plate are made of strong and rust resistant materials
- Equipped with a two-way ball-valve
- Equipped with a Pressure Valve and two pressure gauges
- The air filter is made of metal

SAFETY INSTRUCTION

INCLUDE : User Manual, Warranty Card, Oil Machine, Cover Engine Oil, Air Filter

TECHNICAL INFORMATION

The RYU Compressor-1 design was adopted for the manufacture of this compressor so as to further increase the efficiency of the motor, combined with the selection of quality materials that make it less prone to damage and rust, this new value design can improve compresion efficiency.
The fully automatic control system aims for comfortable, safe and reliable operation. suitable for operating performance at home, workshop, indoors and outdoors so versatile and portable that operation, finishing and maintenance are extremely convenient.

SPECIFICATION

Curent	: <7.5 A
Input Power	: <1500 WATT
Rotate Speed	: 2850 rpm ± 10%
Power Cable	: 180 mm
Gas On time	: 90s ± 5
Switch Machine	: 0.8 ± 0.02 Mpa
Downtime	
Restoring Boot	: 0.5 ± 0.02 Mpa
Pressure Switch	
Tank Capacity	: 30 L
Piece Rotor Plate	: 130 Pc
Diameter Piston	: 47 mm
Stroke	: 38

COMPRESSOR

- The electric motor and valve are made of strong and rust resistant materials
- Equipped with a two-way ball-valve
- Equipped with a pressure valve and two pressure gauges
- The air filter is made of metal

INCLUDE : User Manual, Warranty Card, Oil Machine, Cover Engine Oil, Air Filter

SPECIFICATION	RCP 75-1 (3/4 HP)	RCP 100-1 (1.0 HP)	RCP 200-1 (2 HP)	RCP 250-1 (2.5 HP)
CURRENT	< 2.27 A	< 3.40 A	< 6.81 A	< 8.63 A
INPUT POWER	< 500 Watt	< 750 Watt	< 1500 Watt	< 1900 Watt
ROTATE SPEED	2800 ± 10% rpm	2800 ± 10% rpm	2850 ± 10% rpm	2850 ± 10% rpm
POWER CABLE	> 180 mm	> 180 mm	> 180 mm	> 180 mm
GAS ON TIME	55s ± 5	90s ± 5	100s ± 5	190s ± 5
SWITCH MACHINE DOWNTIME	0.8 ± 0.02 Mpa	0.8 ± 0.02 Mpa	0.8 ± 0.02 Mpa	0.8 ± 0.02 Mpa
RESTORING BOOT PRESSURE SWITCH	0.5 ± 0.02 Mpa	0.5 ± 0.02 Mpa	0.5 ± 0.02 Mpa	0.5 ± 0.02 Mpa
TANK CAPACITY	10 L	25 L	35 L	50 L
PIECE ROTOR PLATE	80 Pc	100 Pc	130 Pc	130 Pc
DIAMETER PISTON	42 mm	42 mm	47 mm	47 mm
STROKE	32	35	38	38

RYU
POWER TOOLS • ACCESSORIES • ENGINE
MODEL
RG1500-1
MULTIMETER
AC 230V
CIRCUIT BREAKER

RG1500-1
GASOLINE GENERATOR SET

TECHNICAL INFORMATION

RYU (UN) GASOLINE GENERATOR RG1500-1 is a generator that uses gasoline as fuel. Used as a producer of electrical energy to replace cut electrical energy or for an area that has not yet entered electricity. This generator has an average power of 900 watts and a maximum power of 1000 watts. The maximum power can be used as a backup when the electricity demand exceeds the average power. This generator has a fuel capacity of 8 L and an engine oil capacity of 350 ml. With this capacity of fuel and oil, this generator can be operated for a long time, namely 8.5 hours (75% load).With an easy recoil (crank) ignition system, users won't run out of a lot of time and energy just to turn on this generator. The noise level of this generator is 56 decibels, a level that is still comfortable and not too noisy. So that it will not disturb the environment around the user.

Selling Point Information

- Professional Altenator makes output power more strong
- Heavy duty cast iron engine
- Easy pull recoil start
- Double muffler ensures quite operation

SPECIFICATION

Generator

Max Power	: 1000 W
Rated Power	: 900 W
Rated Ampere	: 4.5 A
Rate Power	: 220 V
Voltage	: 5o Hz
DC Output	: 12 V / 8.3 A
Phase	: Single

Engine

Type	: 4 Stroke,OHV, Air Cooled
Engine Model	: NP 1500
Displacement	: 87 cc
Max. Power Output	: 2.8 HP / 3600 RPM
Starting System	: Recoil Starting
Fuel	: Gasoline
Fuel Tank Capacity	: 8 L
Oil Engine Capacity	: 350 ML
Noise Level	: 56 dB
Dimension	: 50 x 39 x 42 CM
Gross Weight	: 28 Kg

Configuration

Automatic Voltage Regulator	: Yes
Fuel Meter	: Yes
Volt Meter	: Yes
Hour Meter	: Yes
2-Wheel Transport Kit	: Yes
Double Receptable/Plug Female	: Yes
Brush Altenator	: Yes

GANSOLINE GENERATOR SET

RG1500-1

- Max Power Output 1000 W
- Displacment 87cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 8 Liters
- Recoil Starting
- With AVR

RG2800-1

- Max Power Output 2500 W
- Displacment 163cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 18 Liters
- Recoil Starting + electric starting
- With AVR

RG3800-1

- Max Power Output 2800 W
- Displacment 196cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 18 Liters
- Recoil Starting + electric starting
- With AVR

	SPECIFICATION	RG 1500-1	RG 2800-1	RG 3800-1	RG 7800-1	RG 8800-1	RG 9800-1
GENERATOR	MAX POWER	1.000 W	2.500 W	2.800 W	5.500 W	6.500 W	8.000 W
	RATED POWER	900 W	2.000 W	2.500 W	5.000 W	6.000 W	7.000 W
	RATED AMPERE	4,5 A	9,1 A	11,4 A	22,7 A	29,5A	32 A
	RATED VOLTAGE	220 V					
	FREQUENCY	50 Hz					
	DC OUTPUT	12 V / 8,3 A					
	PHASE	SINGLE					
ENGINE	TYPE	4 STROKE, OHV SINGLE - CYLINDER GASOLINE ENGINE WITH FORCED AIR COOLED					
	ENGINE MODEL	NP 1500	GX 160	GX 200	GX 390	GX 420	GX 500
	DISPLACEMENT	87 CC	163 CC	196 CC	389 CC	420 CC	439
	MAX POWER OUTPUT	2.8 HP/3.600 RPM	5.5 HP/3.600 RPM	6.5 HP/3.600 RPM	13 HP/3.600 RPM	16 HP/3.600 RPM	19HP/3.600 RPM
	STARTING SYSTEM	RECOIL STARTING	RECOIL STARTING + ELECTRIC STARTING				
	FUEL	GASOLINE					
	FUEL TANK CAPACITY	8 L	18 L	18 L	28 L	28 L	28 L
	OIL ENGINE CAPACITY	350 ML	600 ML	600 ML	1.100 ML	1.100 ML	1.100 ML
	NOISE LEVEL	56 dB	68 dB	70 dB	77 dB	77 dB	78 dB
	DIMENSION	50 x 39 x 42 CM	66 x 50 x 47 CM	66 x 50 x 47 CM	71 x 57 x 63 CM	71 x 57 x 63 CM	71 x 60 x 63 CM
	GROSS WEIGHT	28 KG	45 KG	48 KG	85 KG	87 KG	92 KG
CONFIGURATION	AUTOMATIC VOLTAGE REGULATOR	√	√	√	√	√	√
	FUEL METER	√	√	√	√	√	√
	VOLT METER	√	√	√	√	√	√
	HOUR METER	√	√	√	√	√	√
	AMPERE METER	X	√	√	√	√	√
	12 V DC OUTPUT	X	√	√	√	√	√
	2 WHEEL TRANSPORT KIT	√	√	√	√	√	√
	DOUBLE RECEPTAPLE/PLUG FEMALE	√	√	√	√	√	√
	BRUSH ALTERNATOR	√	√	√	√	√	√

INCLUDE : User Manual, Warranty Card

RG7800-1

- Max Power Output 5500 W
- Displacment 389cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 28 Liters
- Recoil Starting + electric starting
- With AVR

RG8800-1

- Max Power Output 6500 W
- Displacment 389cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 28 Liters
- Recoil Starting + electric starting
- With AVR

RG9800-1

- Max Power Output 8000 W
- Displacment 439cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 28 Liters
- Recoil Starting + electric starting
- With AVR

WATER PUMP

GREEN20CX

- Max Power Output 5.5 HP/3,600 RPM
- Displacment 163cc
- Horisontal Shaft 4 Stroke Air Cooled,
- OHV
  Full Tank 3.6 Liters
- Recoil Starting
- Suction Dia 1”
- Discharge Dia 1”

GREEN30CX

- Max Power Output 5.5 HP/3,600 RPM
- Displacment 196cc
- Horisontal Shaft 4 Stroke Air Cooled,
- OHV
  Full Tank 3.6 Liters
- Recoil Starting
- Suction Dia 1”
- Discharge Dia 1”

RS10CX

- Max Power Output 5.5 HP/6,500 RPM
- Displacment 163cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 0.7 Liters
- Recoil Starting
- Suction Dia 1”
- Discharge Dia 1”

RS40CX

- Max Power Output 5.5 HP/3,600 RPM
- Displacment 389cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 6.5 Liters
- Recoil Starting
- Suction Dia 1”
- Discharge Dia 1”

		RS 10 CX	GREEN 20 CX	GREEN 30 CX	RS 40 CX
SUCTION PORT DIA	mm	25 (1 inch)	50 (2 inch)	80 (3 inch)	100 (4 inch)
DISCHARGE PORT DIA	mm	25 (1 inch)	50 (2 inch)	80 (3 inch)	100 (4 inch)
MAX. DISPLACEMENT	m3/h2	83	66	O9	6
RATED DISPLACEMENT	m3/h1	82	23	66	4
MAX. HEAD	m1	52	63	O3	1
SELF-PRIMING TIME	s/4m	-	70	120	180
MAX. SUCTION HEAD	m1	O8	-	88	
TYPE		2 Stroke	Air Cooled 4 Stroke, OHV Single Cyl, Horisontal Camshaft		
MODEL		TU26	GX 160	GX 200	GX 390
RATED POWER	HP/ RPM	/6500	5.5/3600	6.5/3600	13/3600
DISPLACEMENT	L2	6	163	196	389
FUEL TANK CAPACITY	L	0.7	3.6	3.6	6.5
STARTING SYSTEM		Recoil			
OIL SPESIFICATION		-	SAE 10W30		
NET WEIGHT	Kg	2.5	24	26	31
DIMENSION (L X W X H)	Cm	26 x 26 x 19	45 x 38 x 39	51 x 38 x 45	61 x 48 x 54

INCLUDE : User Manual, Warranty Card

GANSOLINE ENGINE

	RS 160	RS 200	RS 200 LS	RS 270	RS 270 LS
TYPE	Air Cooled 4 Stroke, OHV Single Cyl, Horizontal Shaft				
MAX POWER / RPM	5.5 / 3600	6.5 / 3600	6.5 / 1800	9.0 / 3600	9.0 / 1800
BORE X STROKE	68 x 456	8 x 456	8 x 45	77 x 58	77 x 58
DISPLACEMENT	163	196	196	270	270
COMPRESSION RATIO	8.5 : 1	8.2 : 1			
IGNITION SYSTEM	TCI				
STARTING SYSTEM	RECOIL				
LUBRICATION SYSTEM	SPLASH				
FUEL TANK CAPACITY	3.66				6.0
OIL CAPACITY	600			1000	
AIR CLEANER	Semi - Dry				
DIMENSION	36 x 31 x 33	37 x 31 x 33	39 x 38 x 34	43 x 38 x 41	53 x 48 x 48
WEIGHT	15 Kg	16 Kg	18 Kg	25 Kg	27 Kg
LUBE SPESIFICATION	SAE 10W30				

DESCRIPTION

RS 160
- Max Power Output 5.5 HP / 3,600 Rpm
- Displacment 163cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 3.6 Liters

RS 200
- Max Power Output 6.5 HP / 3,600 Rpm
- Displacment 196cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 3.6 Liters

RS 200 LS
- Max Power Output 6.5 HP / 1,800 Rpm
- Displacment 196cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 3.6 Liters

RS 270
- Max Power Output 9 HP / 3,600 Rpm
- Displacment 270cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6 Liters
  Recoil Starting

RS 270 LS
- Max Power Output 9 HP / 1,800 Rpm
- Displacment 270cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6 Liters
  Recoil Starting

INCLUDE : User Manual, Warranty Card

	RS 390	RS 390 LS	RS 420	RS 420 LS	RS 460	RS 460 LS	RS 640
TYPE	Air Cooled 4 Stroke, OHV Single Cyl, Horizontal Shaft						
MAX POWER / RPM	13 / 3600	13 / 1800	16 / 3600	16 / 1800	18 / 3600	18 / 1800	18 / 2800
BORE X STROKE	88 x 649		0 x 64		90 x 66		85 x 63
DISPLACEMENT	389		407		459		85 x 63
COMPRESSION RATIO	8.2 : 1						
IGNITION SYSTEM	TCI						
STARTING SYSTEM	RECOIL						
LUBRICATION SYSTEM	SPLASH						
FUEL TANK CAPACITY	6.5						8.7
OIL CAPACITY	1000						
AIR CLEANER	Oil - Bath						
DIMENSION	45 x 41 x 445	3 x 48 x 484	7 x 43 x 47	55 x 51 x 51	58 x 56 x 546	2 x 56 x 54	
WEIGHT	31 Kg	34 Kg	36 Kg	39 Kg	40 Kg	42 Kg	31 Kg
LUBE SPESIFICATION	SAE 10W30						

DESCRIPTION

RS390
- Max Power Output 13 HP / 3.600 Rpm
- Displacment 389cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
  Recoil Starting

RS390LS
- Max Power Output 13 HP / 1,800 Rpm
- Displacment 407cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
  Recoil Starting

RS420
- Max Power Output 16 HP / 3,600 Rpm
- Displacment 407cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
  Recoil Starting

RS420LS
- Max Power Output 18 HP / 1.800 Rpm
- Displacment 407cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
  Recoil Starting

RS460
- Max Power Output 13 HP / 3,600 Rpm
- Displacment 459cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
  Recoil Starting

RS460LS
- Max Power Output 18 HP / 1,800 Rpm
- Displacment 459cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
  Recoil Starting

RS640
- Max Power Output 18 HP / 2,800 Rpm
- Displacment 459cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 8.7 Liters
  Recoil Starting

INCLUDE : User Manual, Warranty Card

RG1300
GREEN / BLACK 1300 GENERATOR

GENERATOR GREEN / BLACK	
MAX POWER	1.000 Watt
RATED POWER	850 Watt
RATED AMPERE	3.0 A
VOLTAGE	220 Volt
FREQUENCY	50 Hz
DC OUTPUT	12/10 V/A
PHASE	Single Phase
TYPE	2 Stroke Engine
ENGINE MODEL	ET 950
MAX POWER OUTPUT	2.8/3000 HP/RPM
STARTING SYSTEM	Recoil Starting
FUEL	**Gasoline + Oil (50:1)**
FUEL TANK CAPACITY	4.5 Liter
NOISE LEVEL	63 dB
DIMENSION	38.5 x 32 x 33 CM
GROSS WEIGHT	21 Kg
FUEL METER	√
VOLTMETER	√
12 V DC OUTPUT	√

- Max Power Output 1000 W
- 2 Tak Machine
- Full Tank 4 Liters
- Recoil Starting
- With AVR

INCLUDE : User Manual, Warranty Card

RBC2T
BRUSH CUTTER 2 TAK

INCLUDE : User Manual, Warranty Card
, Oil Machine, Cover Engine Oil, Air Filter

DESCRIPTION

Material	: Spring Steel
Fuel	: Gasoline 25 L (2-T Oil 1L)
Fuel Capacity	: 1.2 L
Ignition Plug	: BM-7A/CJ6
Weight	: 9.4 kg

Packaging Information
#1 = 40 x 30 x 28cm
#2 = 137 x 7 x 9cm

- Equipped barrier bar for increased stability,
- Chest and back ergonomic harness.
- Air punge system for easy starting.

RPS22
POWER SPAYER 22 L

DESCRIPTION

Model	: RPS22
Pressure	: 22 - 35 kg / cm_2
Speed	: 800 - 1,200 rpm
Suction Ability	: 13 - 22 L / min
Electric Motor	:1.5 - 2.0 HP
Gasoline Engine	: 3.4 - 4.0 PS
Size	: 37 x 30 x 32 cm
Weight	: 6.5 kg / 7.5 kg

- Professional Treated Materials
- Various Designed Accessories
- Long Life Leakless Pump

INCLUDE : User Manual, Warranty Card

RGS22
GASOLINE CHAIN SAW 22" STEEL ALLOY

DESCRIPTION

Guide Bar	: 22 inch
Max Power	: 1.88 KW / 8,500 rpm
Displacement	: 52 cc
Max. Cutting RPM	: 1,000 rpm
Saw Chain (Pitch X Gauge)	: 0.325 X 0.085
Chain Qty	: 43
Teeth of Spocket	: 7 T
Fuel Mixing Rate	: Gasoline (20:1)
Fue Tank Capacity	: 550 ml
Chain Oil Tank Cpacity	: 260 ml
Chain Oil Supply Sistem	: Automatic
Net Weight	: 6.5 kg
Dimension	: 49 x 26 x 28 cm

- High Performance Engine
- High Quality Saw Chain
- Build With Filtration System
- Automatic Filling Oil
- Comfortable And Safety Design

INCLUDE : Manual Book, Warranty Card, Key L 2 pcs, Screwdriver (-) 1 pc, Spark Plug Wrench 1 pc, Bottle 1 pc.

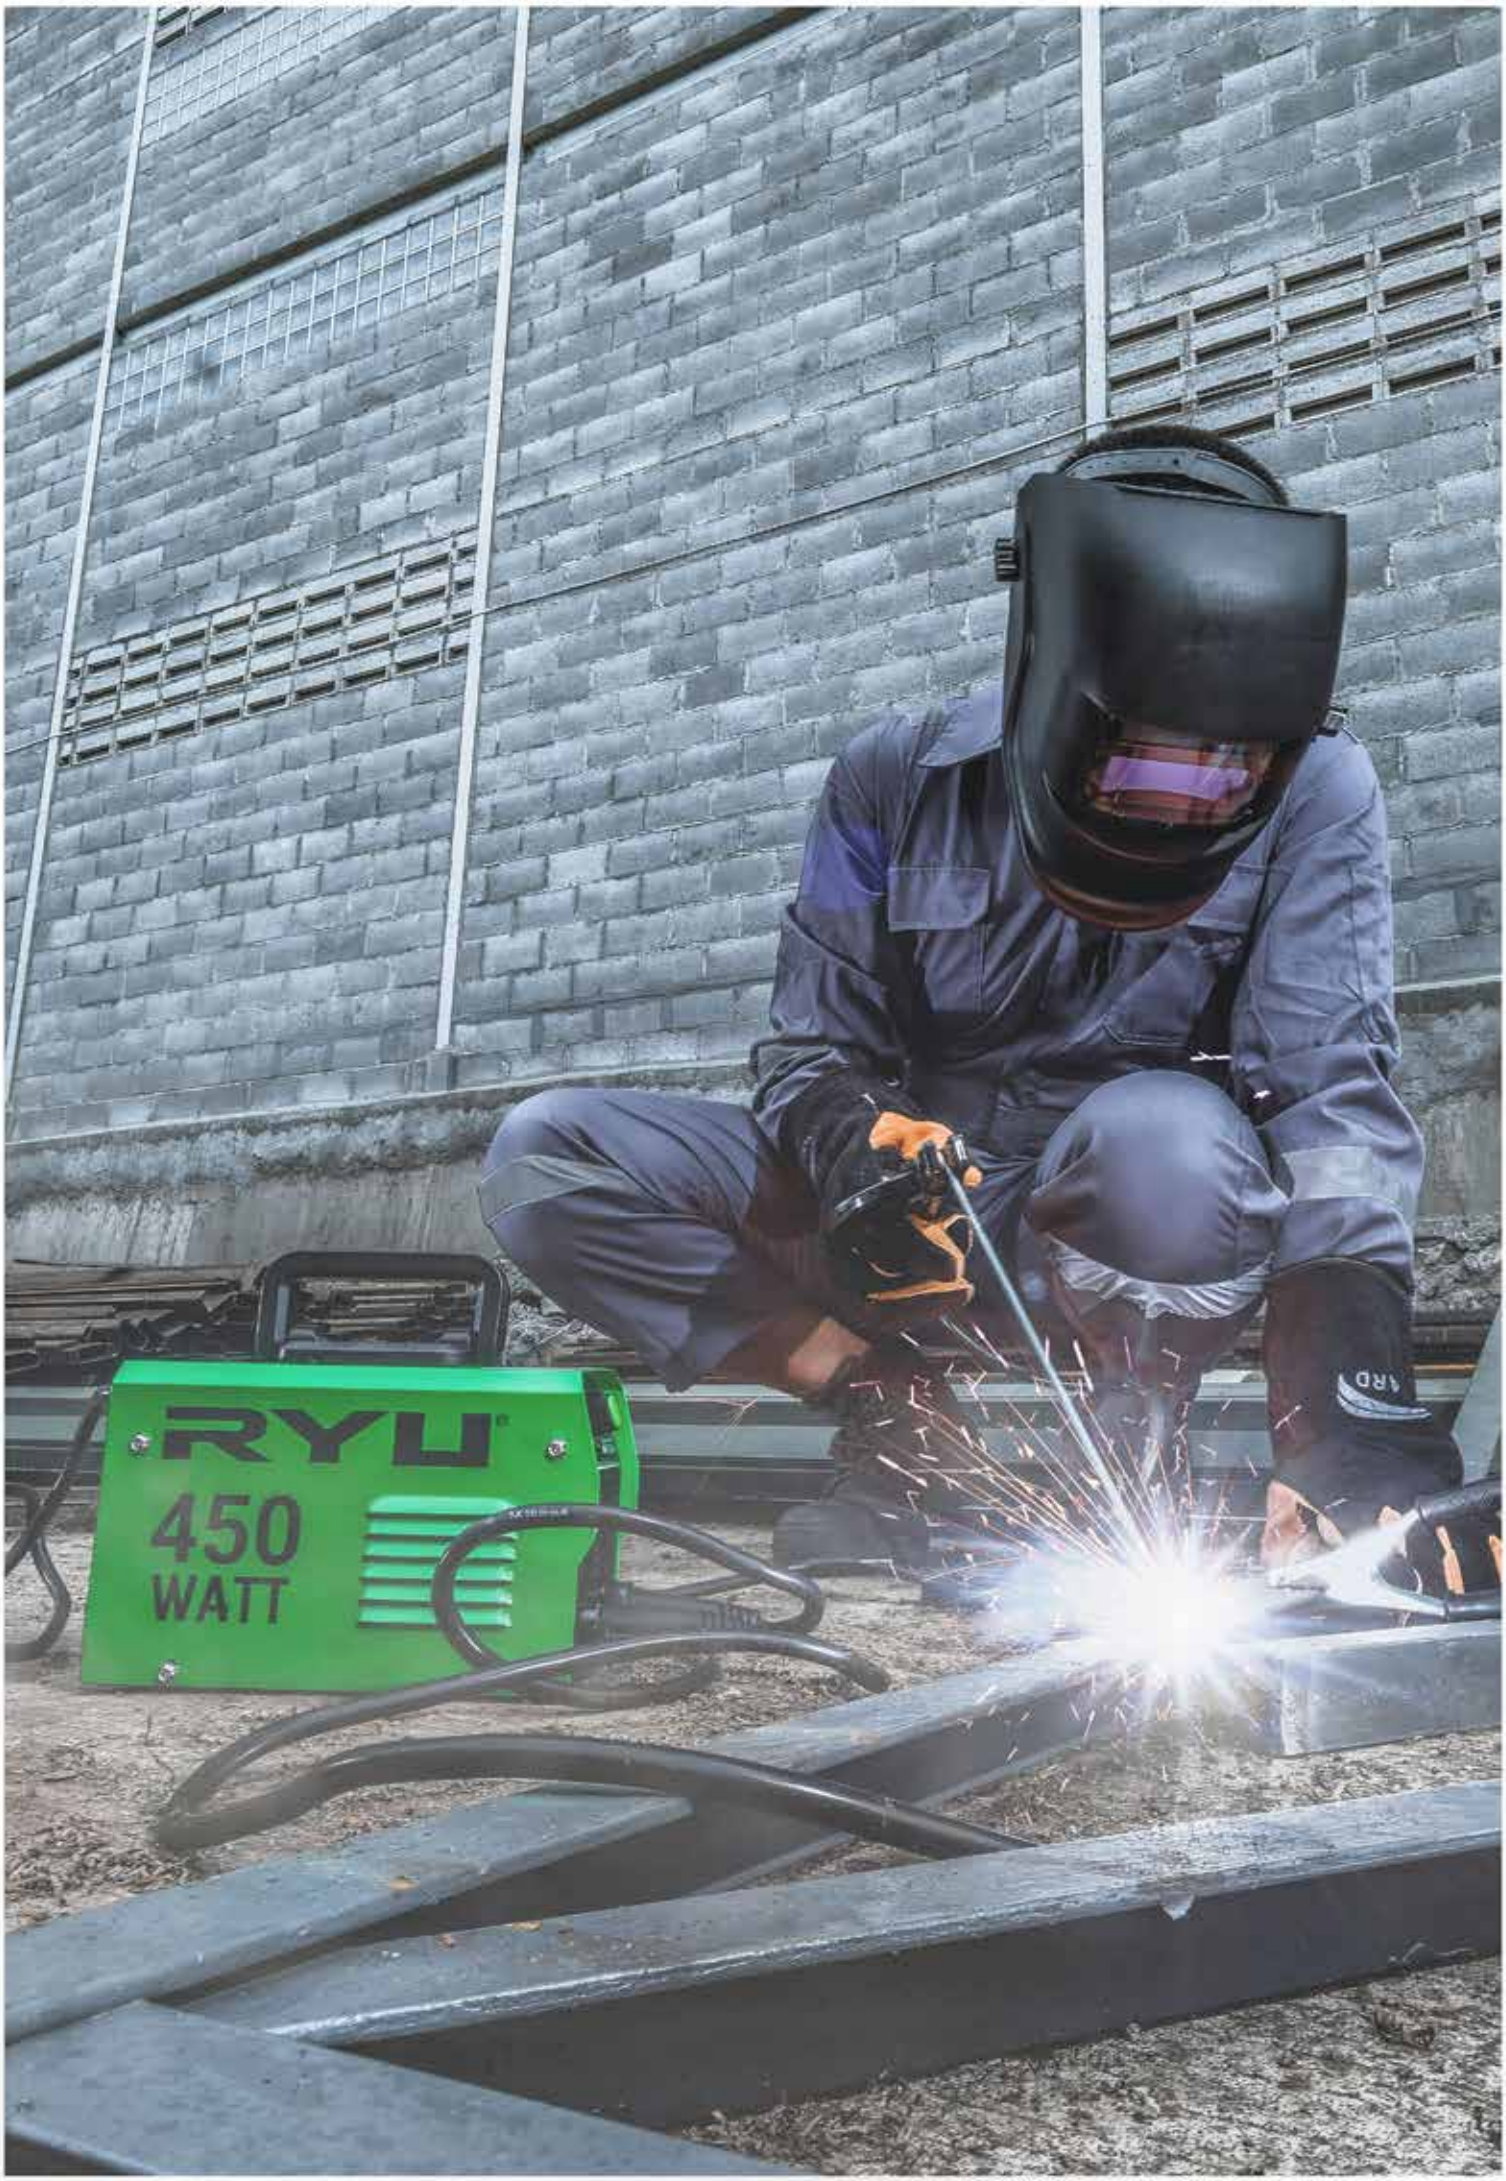
RYU
450
WATT

INVERTER

RII120-2
INVERTER IGBT 120-2

Handle
For quick & easy Handling

Current Selection and Indicator lamp
Design for user friendly

Terminals Connection
For Easy Installation Cable

More Air Outlet
Optimal airflow and cooling air outlets

Information Table

Fan Air Inlet
Optimal airflow and cooling component

Switch ON/OFF

More Air Outlet and Name Brand

Selling Point Information

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

SAFETY INSTRUCTION

IGBT | ANTI STICKING | HOT START | CE

INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

TECHNICAL INFORMATION

The RYU (UN) INVERTER RII120-2 is one type of transformer that has advantages in power consumption and good durability, because it has an IGBT system that can save power while providing a stable and durable arc.
You can also use an electric generator because it already has AVR (Automatic voltage regular) Simple shape, easy to carry can be used with 2.0 mm – 3.2 mm wire, Duty cycle: 60% (100A) & 100% (120A)Completeness: mass welding pliers, hammer welding masks weld.

SPECIFICATION

Rate Input Power	: 450 W
Rate Voltage	: 220 V±15%V
Frequency	: 50/60 Hz
Input Capacity	: 3.4 KVA
Output Current	: 15.5 A
Output Voltage	: 24.4 V
Current Range	: 20 – 120 A
Weight	: 3.85 kg
Packaging Information	
Case Qty	: 4pcs/ctn
G.W/N.W	: 16.6 Kg/15.0 kg
Packaging Size	: 39.5 cm x 31.5 cm x 45 cm

RII120-1
INVERTER IGBT 120-1

IGBT ANTI STICKING HOT START CE

SERVICE WARRANTY

INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

SPECIFICATION

Rate Input Power	: 900 W
Rate Input Voltage	: 220V±15%
Frequency	: 50/60 Hz
Input Capacity	: 5.0 Kva
Duty Cycle	: 60% 40°C
Current Range	: 20 – 120 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 3.2 mm
No-load Voltage	: 62V
Weight	: 4.1 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 18 Kg/18 kg
Packaging Size	: 42,5 cm x 36,5 cm x 49,5 cm

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

RII160-1
INVERTER IGBT 160-1

IGBT ANTI STICKING HOT START CE

SERVICE WARRANTY

INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

SPECIFICATION

Rate Input Power	: 1300 W
Rate Input Voltage	: 220V±15%
Frequency	: 50/60 Hz
Input Capacity	: 5.0 Kva
Duty Cycle	: 60% 40°C
Current Range	: 20 – 160 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 4 mm
No-load Voltage	: 62V
Weight	: 5.6 kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 11,3 Kg/10,4 kg
Packaging Size	: 46,5 cm x 37,5 cm x 30,5 cm

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

RII200-1
INVERTER IGBT 200-1

IGBT | ANTI STICKING | HOT START | CE

INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

SPECIFICATION

Rate Input Power	: 1800 W
Rate Input Voltage	: 220V±15%
Frequency	: 50/60 Hz
Input Capacity	: 5.0 Kva
Duty Cycle	: 60% 40°C
Current Range	: 20 – 200 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 4 mm
No-load Voltage	: 62 V
Weight	: 2.8 kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 12,4 Kg/7,9 kg
Packaging Size	: 46,5 cm x 39 cm x 30 cm

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

RII400
INVERTER 400 A

IGBT | ANTI STICKING | HOT START | CE

INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

SPECIFICATION

Input Power Source	: 3 Phase
Input Voltage	: 380 V
Frequency	: 50/60 Hz
Duty Cycle	: 60% 40°C
Output Current	: 20 – 40 A
Current Range	: 20 – 400 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 4 mm
Weight	: 22.4 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 22.4 Kg/21.4 kg
Packaging Size	: 60 cm x 36 cm x 48.5 cm

- Maximum Ampere 400A
- 380V Input Voltage Rate ± 15%
- ARC - Force for Anti Sticking
- VRD function, safe for welder
- Dust-free Cooling System with increased duty cycle
- Leading edge single IGBT technology

www.ryupowertools.com